




Rail Series

External Lighting



A discreet handrail recessed LED luminaire for lighting internal or external walkways and steps.

Construction: Extruded Aluminium housing, IP66. IK10. Anodized Aluminium Finish.

LED: Available in 2.9w or 5.8w.
122° Beam Angle.
4000K as standard (2700K & 3000K on request).

Installation: Housing fixed via 2 screws into the railing. Railing diameter can range from 42mm to 46mm diameter.

Remote 24V DC SELV Remote LED driver required.


Handrail: Matching 316 grade Stainless Steel handrail with a range of accessories can also be supplied, see overleaf for details.

Options: DALI, 2700K & 3000K.


Manufactured: EU.

Product Compliance: EN 60598; CE.

DIMENSIONS

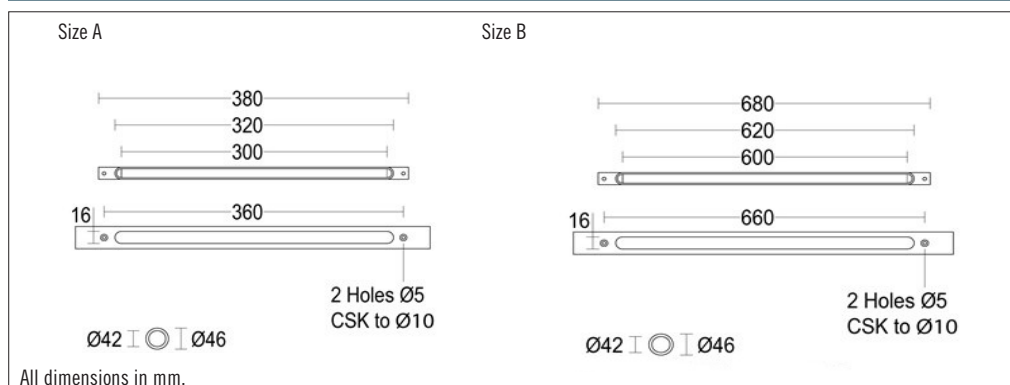

INSTALLATION GUIDELINES

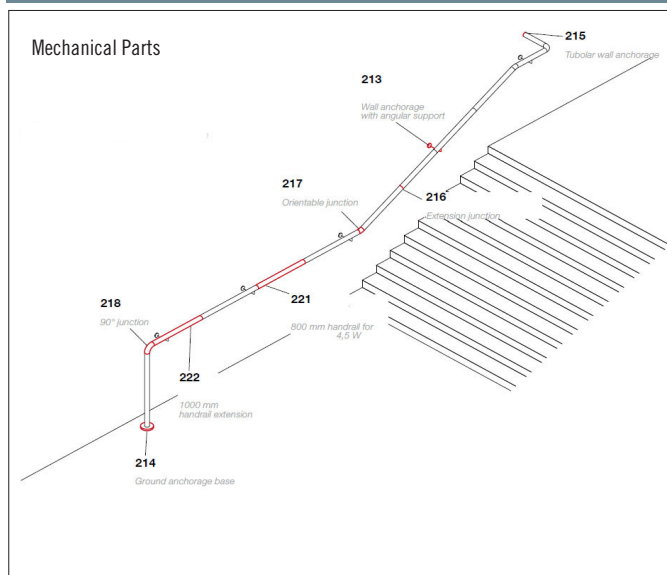

ORDERING CODE - LIGHTING INSERT

Wattage	Type	Size	Code	Details	Lumens*
2.9w	LED	A	G1105.BAX0400EL	Lighting Unit 4K, excluding Driver	207 lm
5.8w	LED	B	G1106.ETX0400EL	Lighting Unit 4K, excluding Driver	414 lm

ORDERING CODE - REMOTE DRIVER

-	-	-	GAC146.0024014FN-67	14w LED driver 24 VDC, IP67	-
-	-	-	GAC088.0024040FN-67	40w LED driver 24 VDC, IP67	-
-	-	-	GAC089.0024081FN-67	81w LED driver 24 VDC, IP67	-

ORDERING CODE - COMPONENTS

-	-	-	GAC213	Wall anchor with angular support	-
-	-	-	GAC214	Ground anchorage base	-
-	-	-	GAC215	Tubular wall anchorage	-
-	-	-	GAC216	Extension junction	-
-	-	-	GAC217	Orientable junction	-
-	-	-	GAC218	90° junction	-
-	-	-	GAC219	End cap	-
-	-	-	GAC220	1500mm handrail for Size B	-
-	-	-	GAC221	800mm handrail for Size A	-
-	-	-	GAC222	1000mm handrail extension	-
-	-	-	GAC318	Handrail support	-

*Luminaire Lumens

OPTIONS

2.7K: 2700K
3K: 3000K, Warm White
DALI: DALI on request

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 234

Veelite