



Widebay LED

Internal Lighting



LED Pendant Industrial luminaire with excellent light throw characteristics providing high vertical light levels. Ideal for general industrial, warehouse, and food industry application.

Construction: IP65 LED optics combined with dropped acrylic Lens refractor permanently sealed to the reflector. IP20 ballast enclosure as standard.

LED Access: LED mounting plate accessible via removal of 8 screws from top side of housing. LED modules servicable.

Gear: Integral (as shown). Remote on request. Power factor >0.9


LED: Up to 200w LED, 4000K, CRI >80. Medium Beam Optics. Temperature -20°C to +40°C. L90 > 54,000 Hrs (@25°C)

Options: Available in recessed version (see Cleanbay leaflet). 3hr Emergency packs available on request.

Product Compliance: EN 60598, CE.

Veelite


Widebay LED with Integral Gear

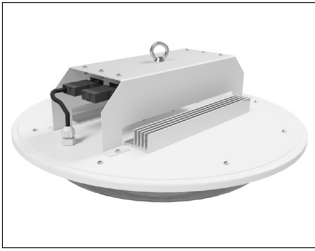

Plug and Play LED connections for quick and easy installation




Quick access to LED control gear for easy maintenance

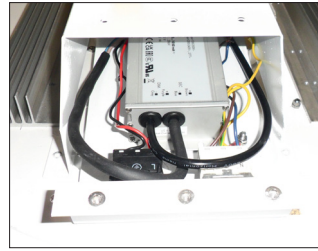

Heatsinks for cooler operation resulting in longer LED lifetime



DIMENSIONS

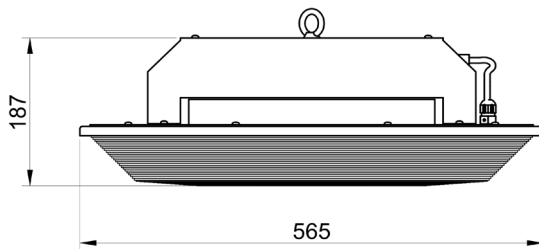

All dimensions are in mm.


Weight 7 kg

APPLICATION GUIDE


WIDEBAY 200W LED*

Spacing (A)	Mounting height			
	6m	8m	10m	12m
6m	496	470	446	424
8m	281	266	252	239
10m	x	182	172	163
12m	x	120	114	108

Average lux level on floor using MF = 0.90.
Reflectances 0.4/0.4/0.2 for ceiling, walls.
Recommended spacing up to 1.5 times the mounting height.

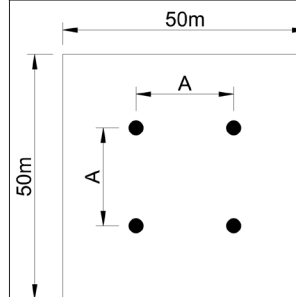

Ceiling recessed version - See Cleanbay datasheet

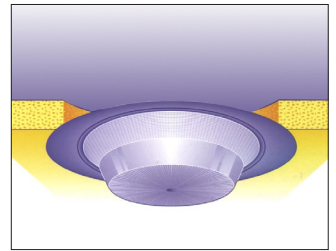

ORDERING CODE

Code	Wattage	Type	Description	Lumens
3WDB18LGA	100w	LED	Widebay LED Pendant with Integral Gear, 4000K	13250
3WDB19LGA	150w	LED	Widebay LED Pendant with Integral Gear, 4000K	20000
3WDB20LGA	200w	LED	Widebay LED Pendant with Integral Gear, 4000K	26500
Other LED wattages available on request				

OPTIONS

EM: Emergency
3K: 3000K LED Colour Temperature
5K: 5000K LED Colour Temperature
BD: Bi-Level Dimming
1-10: 1-10V Dimming
DALI: DALI Control Gear