



S Bollard

External lighting



Robust stainless steel or aluminium slotted bollards, rooted or flanged. Suitable for paths, gardens or Plaza areas.

Construction: High grade stainless steel (316 grade) with 4 x illuminated slots. IP66 Electrical Components. Walls are 3.1mm thick. Shape can be made to order, including height (up to 4m), shape and number of slots and finish.

Aluminium construction is also offered with painted RAL finish.

Also available in non-illuminated version (i.e. no slots), in stainless steel or painted aluminium finish.

Stainless Steel Cap as standard on both Stainless Steel and Aluminium version.

Lens: Acrylic lens as standard.

Installation: Rooted as standard. Removable base available. Flange mounted on request.

Finish - Stainless Version:

Brushed Polished finish with polished cap as standard.

Blasted Stainless with polished cap as option.

Finish - Aluminium Version: RAL 9006 as standard with unpainted (polished stainless) cap.

Painted Aluminium Cap available on request.

LED: 16w LED as standard. LED has rated life up to 50,000 hours, colour 4000K as standard. (3K or 6K on request).


Options: Dimmable gear, removable base, variable height, slots cut to order, non-illuminated version without slots, flanged version, Blasted Stainless Finish, anti-ram insert for added strength.

Product Compliance: EN 60598; CE.




Blasted Stainless Finish (left)
Brushed Polished Finish (right)
Both with Polished Cap.

DIMENSIONS

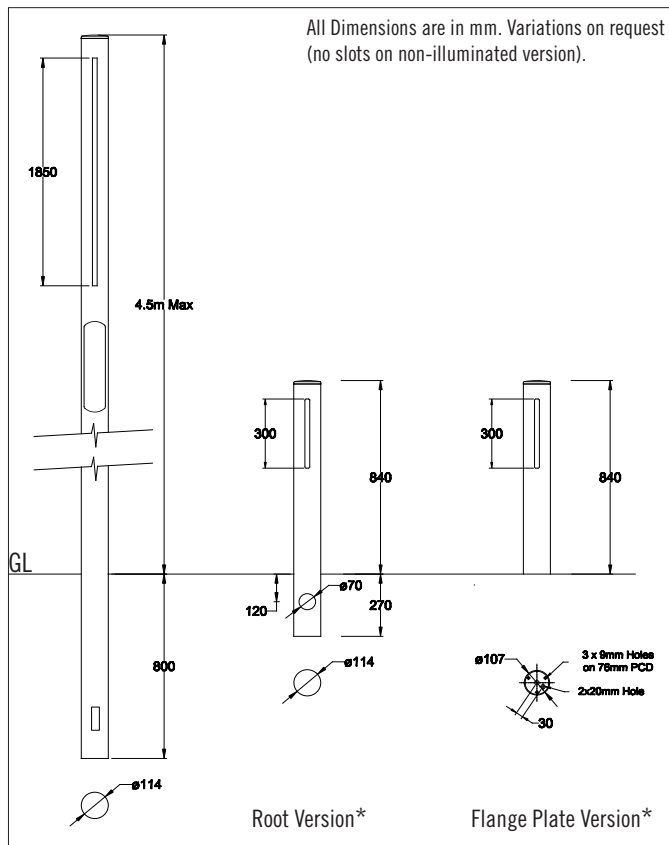


APPLICATION GUIDE

S Bollard
16w LED
Standard Height
Contours in Vertical Lux
@ 0.5m above ground
M. Factor = 1



CAP TYPES

Stainless Polished Cap



Aluminium Painted Cap



Non-Illuminated Version



Anti-Ram Insert



OPTIONS

RAL: Pls Specify (ALU version only)

3K: 3000K Colour Temp.

6K: 6000K Colour Temp.

HGT: Specify Height

CAP: Alternative Cap type

ORDERING CODE

Code Flanged	Code Rooted	LED	Height	Description
5SSB16LAA	5SSB16LAC	16w	0.84m	Aluminium with Stainless Cap.
5SSB16LAB	5SSB16LAD	16w	4.0m	Aluminium with Stainless Cap.
5SSB16LBA	5SSB16LBC	16w	0.84m	316 Stainless Steel, Blasted Finish, with Stainless Cap.
5SSB16LBB	5SSB16LBD	16w	4.0m	316 Stainless Steel, Blasted Finish, with Stainless Cap.
5SSB16LCA	5SSB16LCC	16w	0.84m	316 Stainless Steel, Brush Polished, with Stainless Cap.
5SSB16LCB	5SSB16LCD	16w	4.0m	316 Stainless Steel, Brush Polished, with Stainless Cap.
-	5SSB00100	-	0.84m	316 Stainless Steel with Stainless Cap, Non-Illuminated.
5SSB00103	5SSB00102	-	0.84m	Aluminium with Stainless Cap, Non-Illuminated.
-	5SSB00104	-	0.84m	Aluminium with Aluminium Cap, Non-Illuminated.

*Root and Flange will be larger if Bollard higher than standard 0.84m height.