



Parksave LED

Internal Lighting



IP65 Corrosion Resistant LED Luminaire for Energy Saving in new or refit car parks, corridors, storage rooms, etc.

Construction: Grey polycarbonate housing and frosted polycarbonate diffuser, with stainless steel clips. IP65. IK10
Temperature: -20°C to 35°/50°C*

Installation: Surface Mounting or suspended

LED: 17w -60w LED, 4000K CRI 80 Min. 3000K or 5000K on request.

Lifetime:

L70, B10 - 70,000 hrs @ Ta Max

L80, B10 - 50,000 hrs @ Ta Max

Driver: Philips Xitanium 220-240V, 50/60 Hz
Power Factor >0.90

Option: Emergency Conversion, Motion Sensor Control, DALI.


Manufactured: EU.

Product Compliance: EN 60598; CE.



APPLICATION GUIDE

Version: 45w LED			Version: 25w LED		
Spacing (A)	2 rows	3 rows	Spacing (A)	2 rows	3 rows
4.80m	140 (0.50)	201 (0.57)	4.80m	99 (0.50)	143 (0.57)
7.20m	99 (0.47)	142 (0.50)	7.20m	70 (0.47)	101 (0.50)
9.60m	78 (0.37)*	112 (0.41)	9.60m	55 (0.38)*	80 (0.41)
Ceiling 2.50m		MH - 2.50m		Reflectances: 0.5/0.5/0.2	
Average Lux Levels, based on 0.9 maintenance factor, uniformity shown in brackets					
* Does not comply with uniformity standards.					

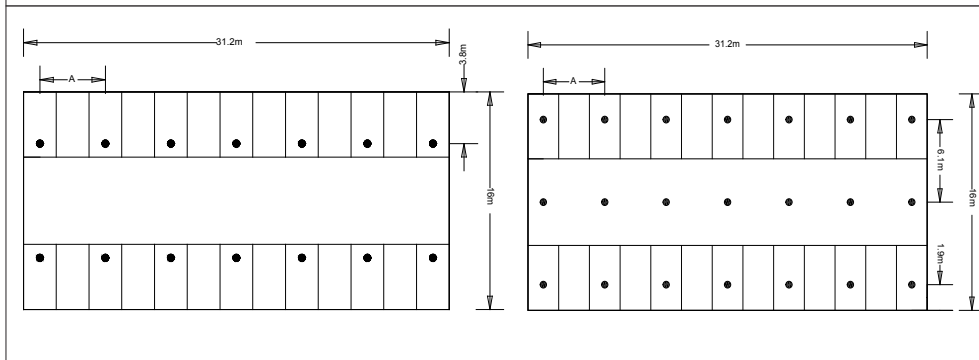

DIMENSIONS

All Dimensions are in mm.	L	W	H
1	1275	84	99
2	1575	84	99
3	1275	134	99
4	1575	134	99

ORDERING CODE

Wattage	Type	Size	Code	Description	Ta Max*	Lumens
17w	LED	1	3PSA1019L	Parksave LED luminaire	50 °C	2750 lm
25w	LED	1	3PSA1032L	Parksave LED luminaire	43 °C	4120 lm
35w	LED	1	3PSA1040L	Parksave LED luminaire	35 °C	5600 lm
20w	LED	2	3PSA2023L	Parksave LED luminaire	50 °C	3110 lm
31w	LED	2	3PSA2041L	Parksave LED luminaire	43 °C	5150 lm
44w	LED	2	3PSA2049L	Parksave LED luminaire	35 °C	7000 lm
25w	LED	3	3PSA3030L	Parksave LED luminaire	45 °C	4120 lm
45w	LED	3	3PSA3045L	Parksave LED luminaire	40 °C	6210 lm
37w	LED	4	3PSA4037L	Parksave LED luminaire	50 °C	5530 lm
53w	LED	4	3PSA4056L	Parksave LED luminaire	40 °C	8100 lm
60w	LED	4	3PSA4063L	Parksave LED luminaire	35 °C	8900 lm

OPTIONS

EM: Emergency
DALI: Dali Driver
SEN: Motion Sensor

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 281A

Veelite