



Joyau

External Lighting



Decorative LED luminaire, available in 2 sizes. Ideal for roadways, urban areas, etc.

Construction: Die-cast aluminium. IP66. IK09 as standard, IK10 on request.

Lens: Tempered glass as standard.

Installation: Post-top with yoke bracket as standard. Also pendant version option (multiple brackets available). Luminaire supplied with 60mm mastfitter as standard.

Finish: Grey RAL 9006 as standard. Other RAL colours on request.

LED: Available in 19w to 77w LED (see ordering codes). 4K as standard, 3K on request.

Life: L70 B10 >100,000 hours.

Options: Special Version for Marine areas, 3K version, IK 10, other RAL colours on request.


Manufactured: EU.

Product Compliance: EN 60598; CE.

Veelite



DIMENSIONS

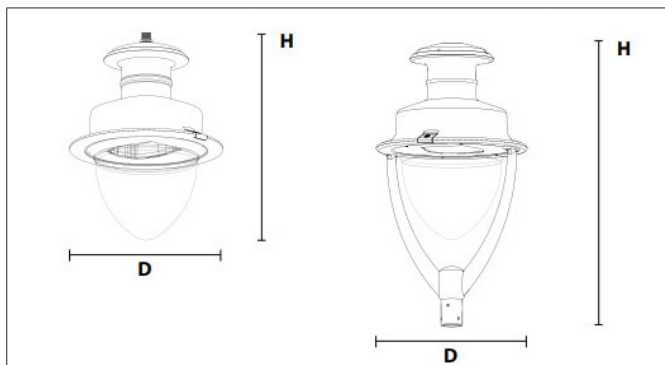

All Dimensions in mm

	H:	D:	EPA:	Weight:
Size 1 (Pendant)	630	460	0.10m ²	8.5kg
Size 2 (Pendant)	780	580	0.14m ²	11.7kg
Size 3 (Post-top)	1100	580	0.18m ²	17.02kg

ORDERING CODE

Wattage	LED	Size	Code	Details	Lumens
19w	16LED	3	5JOY09LGA	Post-Top with 350mA driver	2300 lm
27w	16LED	3	5JOY10LGA	Post-Top with 500mA driver	3120 lm
38w	16LED	3	5JOY11LGA	Post-Top with 700mA driver	4105 lm
52w	32LED	3	5JOY12LGA	Post-Top with 500mA driver	6235 lm
73w	32LED	3	5JOY13LGA	Post-Top with 700mA driver	8205 lm
77w	48LED	3	5JOY14LGA	Post-Top with 500mA driver	9355 lm

OPTIONS

RAL: Pls specify
3K: 3000K, Warm White
MRN: Marine Finish
IK10: IK 10 Protection