



Lampi Series

External lighting



Range of cylindrical light fittings in the form of an openwork stainless steel cage suspended from an aluminum electrical housing.

Construction: Electrical housing:
Aluminium. IP66, IK08.
Cage: Stainless steel.

Lens: Tempered glass lens.

Installation: Pendant version as standard.

Finish: Grey RAL 9006 as standard. other colors on request.

LED: 15w - 54w - Lampi mini
10w - 73w - Lampi Maxi
15w - 73w Lampi Glow
4000K as standard, 3000K or other CCT on request. Asymmetric street optic A10 as standard. See ordering codes for more details.

LED Lifetime: L90 B10 >100,000 hours (@25°C)

Driver: 220-240V AC 50/60 Hz.
Lifetime (<10% failures): 100,000 hrs.



Options: Surge protector.


Zhaga or Nema socket on top of the luminaire to connect OLC or photocell. Zhaga socket at the bottom of the luminaire to add accessories such as sensors.

Customised logo can be added to cage.


Manufactured: EU.

Product Compliance: EN 60598; CE.





DIMENSIONS

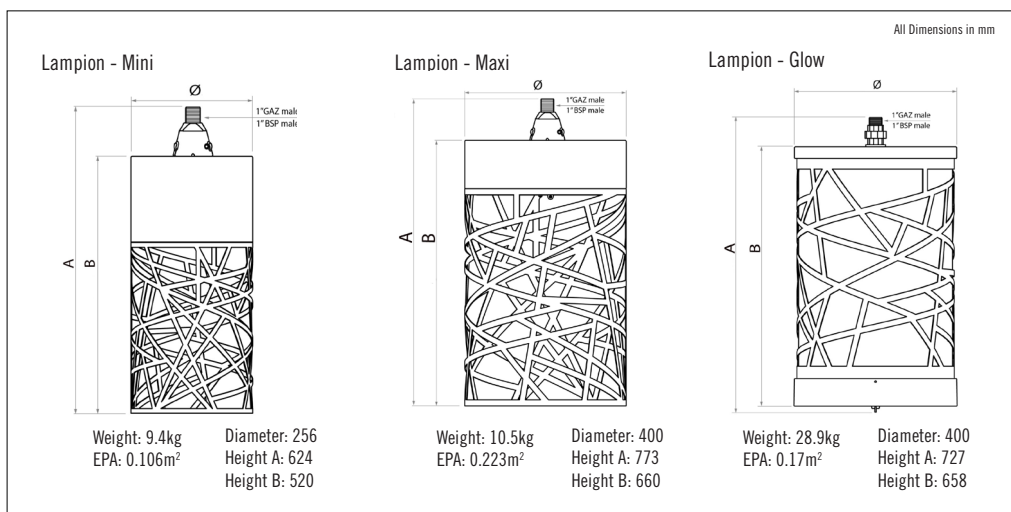

APPLICATION GUIDE


Lampi Glow Version Symmetric

36w LED 4000K

4m Height

Contours in Lux

M. Factor = 0.90



OPTIONS

RAL: Pls Specify

DALI: DALI Dimmable

1-10V: 1-10V Dimmable

CLO: Constant Lumen Output

PRO: Programmed Dimming

3K: 3000K, Warm White

2.7K: 2700K, Warm White

ORDERING CODE

Wattage	Type	Code - Mini	Code - Maxi	Code - Glow	Details	Lumens
10w	8LED	-	5LMP10LGX	-	Lampi, 350 mA driver, 4k	980 lm
26w	16LED	-	5LMP26LGX	-	Lampi, 500 mA driver, 4k	2690 lm
36w	16LED	-	5LMP36LGX	-	Lampi, 700 mA driver, 4k	3600 lm
52w	24LED	-	5LMP52LGX	-	Lampi, 700 mA driver, 4k	5400lm
69w	32LED	-	5LMP69LGX	-	Lampi, 700 mA driver, 4k	7210 lm
73w	48LED	-	5LMP73LGX	-	Lampi, 500 mA driver, 4k	8080 lm
15w	1LED	5LMP15LGS	-	-	Lampi, 350 mA driver, 4k	1095 lm
29w	1LED	5LMP29LGS	-	-	Lampi, 700 mA driver, 4k	2000 lm
38w	2LED	5LMP38LGS	-	-	Lampi, 500 mA driver, 4k	3000 lm
54w	2LED	5LMP54LGS	-	-	Lampi, 700 mA driver, 4k	4000 lm
15w	12LED	-	-	5LMP15LGG	Lampi, 350 mA driver, 4k	1880 lm
38w	24LED	-	-	5LMP38LGG	Lampi, 500 mA driver, 4k	5100 lm
73w	73LED	-	-	5LMP73LGG	Lampi, 500 mA driver, 4k	10300 lm

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 307

Veelite