




Trak Series

Recessed
Groundlight



Trak Series is available as a linear recessed ground light in several lengths.

Construction: Anodized aluminium with 8mm tempered glass lens. IP68. IK10.

Installation: Separate Installation
Cassette supplied with Luminaire.
200mm drainage area needed.
Surface Temperature $\leq 70^{\circ}\text{C}$.

LED: 4w - 36w LEDs. Symmetric. 4K as standard (3K on request).

Driver: Remote 24 VDC driver required.

Options: 3K, Dali, RGB.


Manufactured: EU.

Product Compliance: EN 60598; CE.

Warning: Groundlite can be glare , slip or burn hazard. Vandalism or accidental breakage can result in electrical, glass or trip hazard. Locate to avoid or minimise these hazards.

Veelite

DIMENSIONS

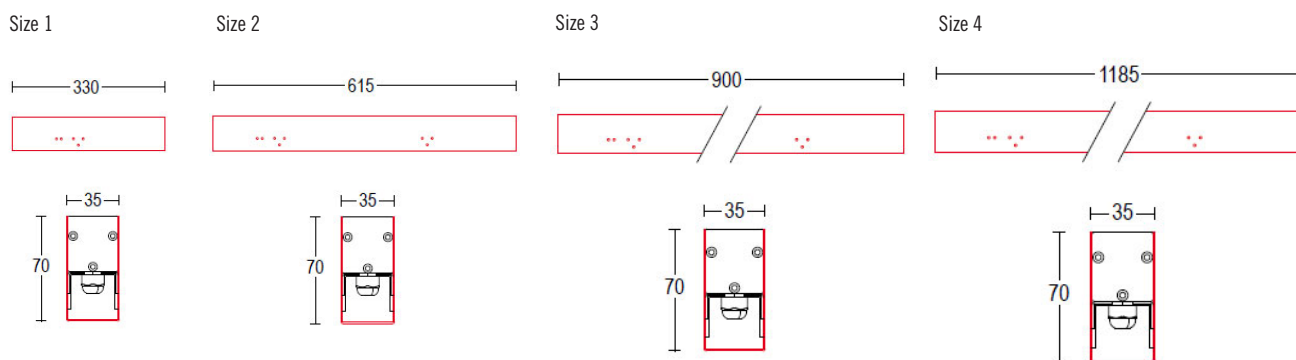

All dimensions in mm.

ORDERING CODE - Groundlight

Wattage	Type	Size	Code	Details	Lens	+ Cassette	Lumens
4w	LED	1	G1538.BGX0400	Trak, 4K, Symmetric Beam 69° x 139°	Opal	GAC333	476 lm
6w	LED	1	G1538.AHX0400	Trak, 4K, Symmetric Beam 69° x 139°	Opal	GAC333	664 lm
9w	LED	1	G1538.LVFT400	Trak, 4K, Symmetric Beam 39° x 19°	Clear	GAC333	972 lm
9w	LED	1	G1538.LVMT400	Trak, 4K, Symmetric Beam 28°	Clear	GAC333	972 lm
8w	LED	2	G1539.LVX0400	Trak, 4K, Symmetric Beam 69° x 139°	Opal	GAC335	1047 lm
12w	LED	2	G1539.BRX0400	Trak, 4K, Symmetric Beam 69° x 139°	Opal	GAC335	1328 lm
18w	LED	2	G1539.BUFT400	Trak, 4K, Symmetric Beam 39° x 19°	Clear	GAC335	1944 lm
18w	LED	2	G1539.BUMT400	Trak, 4K, Symmetric Beam 28°	Clear	GAC335	1944 lm
12w	LED	3	G1540.BRX0400	Trak, 4K, Symmetric Beam 69° x 139°	Opal	GAC528	1618 lm
18w	LED	3	G1540.BUX0400	Trak, 4K, Symmetric Beam 69° x 139°	Opal	GAC528	1992 lm
27w	LED	3	G1540.ELFT400	Trak, 4K, Symmetric Beam 39° x 19°	Clear	GAC528	2916 lm
27w	LED	3	G1540.ELMT400	Trak, 4K, Symmetric Beam 28°	Clear	GAC528	2916 lm
16w	LED	4	G1541.LRX0400	Trak, 4K, Symmetric Beam 69° x 139°	Opal	GAC529	2188 lm
24w	LED	4	G1541.NGX0400	Trak, 4K, Symmetric Beam 69° x 139°	Opal	GAC529	2656 lm
36w	LED	4	G1541.ENFT400	Trak, 4K, Symmetric Beam 39° x 19°	Clear	GAC529	3888 lm
36w	LED	4	G1541.ENMT400	Trak, 4K, Symmetric Beam 28°	Clear	GAC529	3888 lm

ORDERING CODE - Remote Driver

14w	-	-	GAC146.0024014FN-67	Remote Driver 14w, 24 VDC	-	-	-
40w	-	-	GAC088.0024040FN-67	Remote Driver 40w, 24 VDC	-	-	-
81w	-	-	GAC089.0024081FN-67	Remote Driver 81w, 24 VDC	-	-	-
120w	-	-	GAC090.0024120FN-67	Remote Driver 120w, 24 VDC	-	-	-
-	-	-	GAC205-IP66	IP66 housing for driver	-	-	-

OPTIONS

3K: 3000K on request
DALI: DALI on request
RGB: RGB on request

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 353

Veelite