



Parlo LED

Floodlighting



Exterior LED Floodlight, adjustable on vertical and horizontal axis.

Construction: Die-cast aluminium housing. IP65. IK07.

Lens: Clear 5mm tempered glass as standard.

Finish: Light Grey RAL 9006. Dark Grey on request.

LED: 12w - 55w LED. 4K as standard, 3K on request.

Optics: 9 Beam Angles available: 12° Spot to 65° Flood.


Driver: Internal LED Integral.

Options: Different Beam angles and long Arm mounting.


Manufactured: EU.

Product Compliance: EN60598; CE, UKCA.

DIMENSIONS - SURFACE MOUNTED VERSION

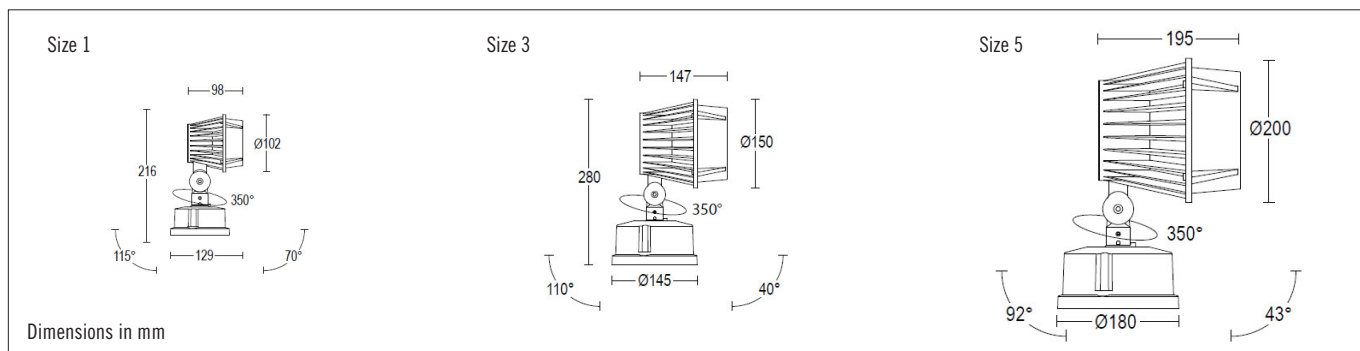

DIMENSIONS - ARM MOUNTED VERSION

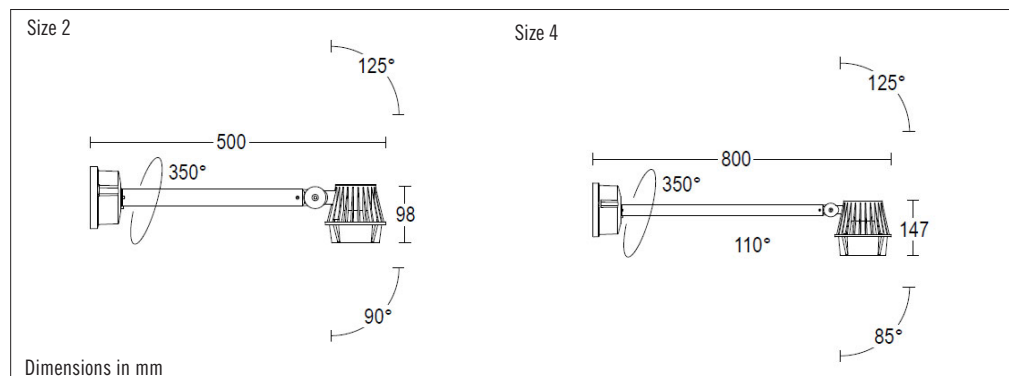

Aluminium Hood



ORDERING CODE

Wattage	Type	Size	Code	Description	Lumens
12w	LED	1	G1129.BRST400	Mini Parlo Floodlight, Surface Mounted, 24° Beam, 4K	1573 lm
12w	LED	1	G1129.BRMT400	Mini Parlo Floodlight, Surface Mounted, 40° Beam, 4K	1573 lm
12w	LED	1	G1129.BRFT400	Mini Parlo Floodlight, Surface Mounted, 60° Beam, 4K	1573 lm
18w	LED	3	G1130.BUST400	Parlo Floodlight, Surface Mounted, 11° Beam, 4K	2205 lm
18w	LED	3	G1130.BUFT400	Parlo Floodlight, Surface Mounted, 47° Beam, 4K	2205 lm
26w	LED	3	G1130.CGST400	Parlo Floodlight, Surface Mounted, 11° Beam, 4K	3012 lm
26w	LED	3	G1130.CGFT400	Parlo Floodlight, Surface Mounted, 47° Beam, 4K	3012 lm
32w	LED	3	G1130.ECST400	Parlo Floodlight, Surface Mounted, 11° Beam, 4K	3781 lm
32w	LED	3	G1130.ECFT400	Parlo Floodlight, Surface Mounted, 47° Beam, 4K	3781 lm
40w	LED	5	G1134.CDST400	Maxi Parlo Floodlight, Surface Mounted, 16° Beam, 4K	6190 lm
40w	LED	5	G1134.CDMT400	Maxi Parlo Floodlight, Surface Mounted, 38° Beam, 4K	6190 lm
40w	LED	5	G1134.CDFT400	Maxi Parlo Floodlight, Surface Mounted, 65° Beam, 4K	6190 lm
55w	LED	5	G1134.HLST400	Maxi Parlo Floodlight, Surface Mounted, 16° Beam, 4K	8000 lm
55w	LED	5	G1134.HLMT400	Maxi Parlo Floodlight, Surface Mounted, 38° Beam, 4K	8000 lm
55w	LED	5	G1134.HLFT400	Maxi Parlo Floodlight, Surface Mounted, 65° Beam, 4K	8000 lm
12w	LED	2	G1147.BRST400	Mini Parlo Floodlight, Arm Mounted, 24° Beam, 4K	1573 lm
12w	LED	2	G1147.BRMT400	Mini Parlo Floodlight, Arm Mounted, 40° Beam, 4K	1573 lm
12w	LED	2	G1147.BRFT400	Mini Parlo Floodlight, Arm Mounted, 60° Beam, 4K	1573 lm
18w	LED	4	G1148.BUST400	Parlo Floodlight, Arm Mounted, 12° Beam, 4K	2205 lm
18w	LED	4	G1148.BUFT400	Parlo Floodlight, Arm Mounted, 47° Beam, 4K	2205 lm
26w	LED	4	G1148.CGST400	Parlo Floodlight, Arm Mounted, 12° Beam, 4K	3012 lm
26w	LED	4	G1148.CGFT400	Parlo Floodlight, Arm Mounted, 47° Beam, 4K	3012 lm
32w	LED	4	G1148.ECST400	Parlo Floodlight, Arm Mounted, 12° Beam, 4K	3781 lm
32w	LED	4	G1148.ECFT400	Parlo Floodlight, Arm Mounted, 47° Beam, 4K	3781 lm

OPTIONS

3K: Pls Specify

.19: Light Grey Finish

.05: Dark Grey Finish