




Neo LED

Groundlight



Compact sized recessed Groundlight in 5 sizes for LED illumination of walls, trees and similar applications.

Construction: Die-cast Aluminium with glass lens. IP68. IK10.

Lens: Tempered Clear Glass lens 8mm to 15mm depending on version.

Installation: Drainage area 300mm required and separate Installation Frame required.


Finish: Stainless steel Trim, with square or round trim.

LED: Available in 6w-33w LED. 4K as standard, 3K on request.

Warning: Groundlights can be a glare, slip, trip or burn hazard. Vandalism or accidental breakage can result in electrical, glass or trip hazard. Locate to avoid or minimise these hazards.

Manufactured: EU.

Product Compliance: EN 60598; CE.




Stainless Steel Round Trim - Size 5



Stainless Steel Square Trim - Size 5



DIMENSIONS

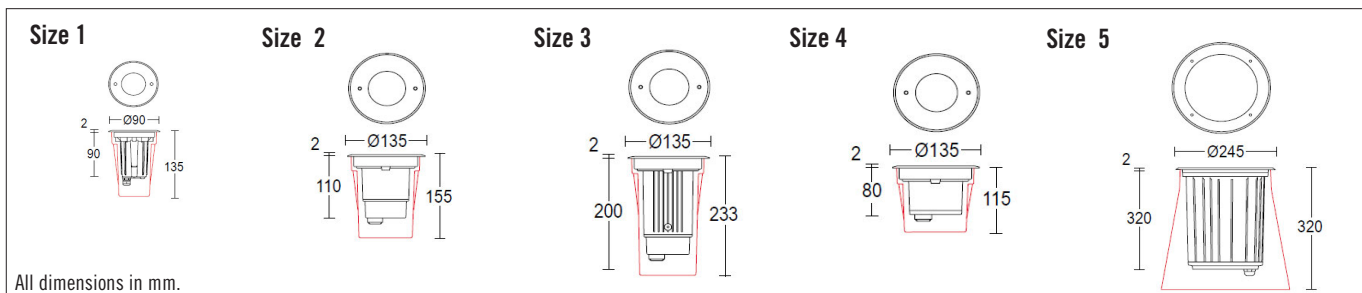

ORDERING CODE

Wattage	Type	Size	Round Version	Square Version	Beam Angle	Details	+ add Frame	Remote Driver	Lumens
6w	LED	1	G5953.AHST400	G5948.AHST400	19°	4K, 350mA Driver - Remote*	GAC013	GAC021.0350014FN-67	877 lm
6w	LED	1	G5953.AHMT400	G5948.AHMT400	40°	4K, 350mA Driver - Remote*	GAC013	GAC021.0350014FN-67	877 lm
9w	LED	1	G5953.CAST400	G5948.CAST400	19°	4K, 500mA Driver - Remote*	GAC013	GAC083.0500014FN-67	1218 lm
9w	LED	1	G5953.CAMT400	G5948.CAMT400	40°	4K, 500mA Driver - Remote*	GAC013	GAC083.0500014FN-67	1218 lm
7w	LED	2	G6615.AHST400	G6616.AHST400	24°	4K, Internal Driver	GAC015	NA	918 lm
7w	LED	2	G6615.AHMT400	G6616.AHMT400	40°	4K, Internal Driver	GAC015	NA	918 lm
7w	LED	2	G6615.AHFT400	G6616.AHFT400	58°	4K, Internal Driver	GAC015	NA	918 lm
12w	LED	3	G5715.BRST400	G5719.BRST400	24°	4K, Internal Driver	GAC016	NA	1573 lm
12w	LED	3	G5715.BRMT400	G5719.BRMT400	40°	4K, Internal Driver	GAC016	NA	1573 lm
12w	LED	3	G5715.BRFT400	G5719.BRFT400	58°	4K, Internal Driver	GAC016	NA	1573 lm
18w	LED	4	G6635.BUST400	G6638.BUST400	24°	4K, 500mA Driver - Remote*	GAC014	GAC207.0500020SN-67	2205 lm
18w	LED	4	G6635.BUMT400	G6638.BUMT400	40°	4K, 500mA Driver - Remote*	GAC014	GAC207.0500020SN-67	2205 lm
18w	LED	4	G6635.BUFT400	G6638.BUFT400	58°	4K, 500mA Driver - Remote*	GAC014	GAC207.0500020SN-67	2205 lm
18w	LED	5	G5102.BUST400	G5101.BUST400	15° Adjustable Beam	4K, Internal Driver	GAC019	NA	2205 lm
18w	LED	5	G5102.BUMT400	G5101.BUMT400	37° Adjustable Beam	4K, Internal Driver	GAC019	NA	2205 lm
18w	LED	5	G5102.BUFT400	G5101.BUFT400	74° Adjustable Beam	4K, Internal Driver	GAC019	NA	2205 lm
26w	LED	5	G5102.CGST400	G5101.CGST400	15° Adjustable Beam	4K, Internal Driver	GAC019	NA	3012 lm
26w	LED	5	G5102.CGMT400	G5101.CGMT400	37° Adjustable Beam	4K, Internal Driver	GAC019	NA	3012 lm
26w	LED	5	G5102.CGFT400	G5101.CGFT400	74° Adjustable Beam	4K, Internal Driver	GAC019	NA	3012 lm
33w	LED	5	G5102.ECST400	G5101.ECST400	15° Adjustable Beam	4K, Internal Driver	GAC019	NA	4206 lm
33w	LED	5	G5102.ECMT400	G5101.ECMT400	37° Adjustable Beam	4K, Internal Driver	GAC019	NA	4206 lm
33w	LED	5	G5102.ECFT400	G5101.ECFT400	74° Adjustable Beam	4K, Internal Driver	GAC019	NA	4206 lm

* Remote LED Drivers - Please specify whether IP20 or IP67 required