



Tanda Bollard

External lighting



Architectural bollard with 360° symmetric lighting (180° degree asymmetric on request). Suitable for pathways, gardens, driveways or landscape areas.

Construction: Extruded aluminium housing. Internal LED Driver. IP65, IK09 - Size A&B, IK10 - Size C.

Lens: Clear Polycarbonate Lens.

Installation: Flanged, with Anchor Bolts.

Finish: Light Grey as standard. Dark Grey or other colours on request. Stainless Steel construction/finish is available with size A only.

LED: Available in 7w - 35w LED. 4000K as standard, 3000K as option. CRI90 as standard, other on request.

Driver: Integral Driver 220-240V AC 50/60Hz.
Operating Temperature -20°C to +35°C.



Options: Uplight as standard, downlight (Tanda Dark) version on request. Different Heights, 180° asymmetric (ie. shield added), different finishes available.


Manufactured: EU.

Product Compliance: EN 60598, CE.






Stainless Steel Version (Size A only)

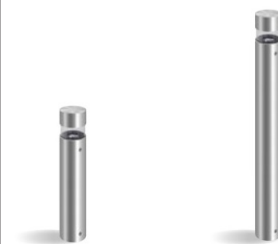

DIMENSIONS

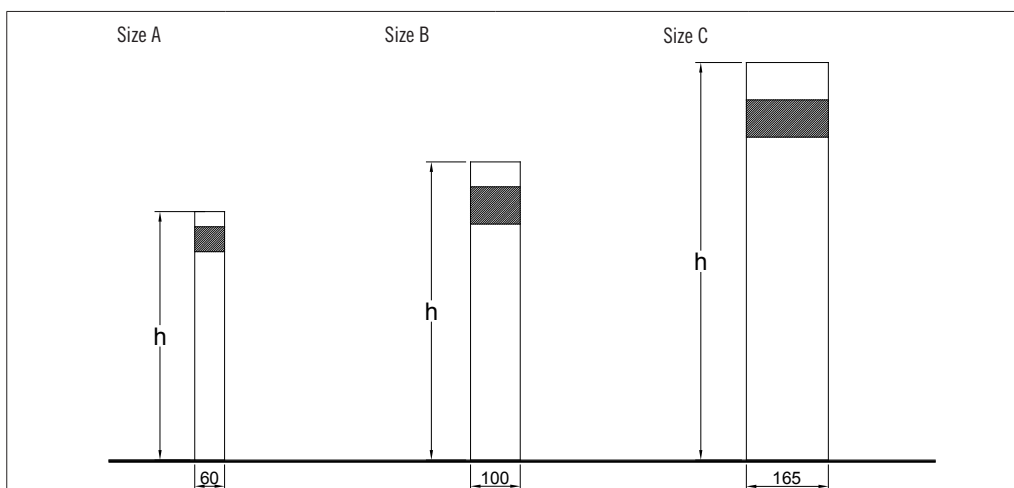

All dimensions in mm

	Size A	Size B	Size C
Height	300 / 500 / 800	175 / 600 / 900	250 / 800 / 1100

Anchor Plate



ORDERING CODE

Wattage	Type	Code - Bollard	+Anchor Plate	Size	Height	Description	Lumens*
7w	LED	G1415.AHXT400	GAC272	A	300	360° beam, flanged, 4K	942 lm
14w	LED	G1415.BRXT400	GAC272	A	300	360° beam, flanged, 4K	1768 lm
7w	LED	G1416.AHXT400	GAC272	A	500	360° beam, flanged, 4K	942 lm
14w	LED	G1416.BRXT400	GAC272	A	500	360° beam, flanged, 4K	1768 lm
7w	LED	G1417.AHXT400	GAC272	A	800	360° beam, flanged, 4K	942 lm
14w	LED	G1417.BRXT400	GAC272	A	800	360° beam, flanged, 4K	1768 lm
9w	LED	G1457.LVXT400	GAC251	B	175	360° beam, flanged, 4K	690 lm
9w	LED	G1372.LVXT400	GAC251	B	600	360° beam, flanged, 4K	690 lm
14w	LED	G1372.BRXT400	GAC251	B	600	360° beam, flanged, 4K	1768 lm
29w	LED	G1372.CGXT400	GAC251	B	600	360° beam, Flanged, 4K	3302 lm
9w	LED	G1375.LVXT400	GAC251	B	900	360° beam, Flanged, 4K	690 lm
14w	LED	G1375.BRXT400	GAC251	B	900	360° beam, Flanged, 4K	1768 lm
29w	LED	G1375.CGXT400	GAC251	B	900	360° beam, Flanged, 4K	3302 lm
22w	LED	G1203.FAXT400	GAC254	C	250	360° beam, Flanged, 4K	2065 lm
27w	LED	G1203.CGXT400	GAC254	C	250	360° beam, Flanged, 4K	3555 lm
22w	LED	G1374.FAXT400	GAC254	C	800	360° beam, Flanged, 4K	2065 lm
27w	LED	G1374.CGXT400	GAC254	C	800	360° beam, Flanged, 4K	3555 lm
35w	LED	G1374.ECXT400	GAC254	C	800	360° beam, Flanged, 4K	4479 lm
27w	LED	G1373.CGXT400	GAC254	C	1100	360° beam, Flanged, 4K	3555 lm
35w	LED	G1373.ECXT400	GAC254	C	1100	360° beam, Flanged, 4K	4479 lm

* Source lumens. Power is total circuit wattage including driver losses.

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 380

Veelite