



Cika Bollard

External lighting



Cika Bollard offered in 2 sizes. Suitable for urban, landscaped or residential projects.

Construction: Die-Cast Aluminium Head, Extruded Aluminium Body, 900mm or 1200mm high, IP66, IK10.

Lens: Polycarbonate Lens.

Installation: Flanged as standard.

Finish: Grey RAL 9006 as standard. Other colours on request (See overleaf).

LED: 8 -16 LEDs, 10w to 26w. CRI >70, 4000K as standard. 3000K or other CCT on request.

LED Life: L80 B10 100,000 hours.


Driver: 220-240V AC 50/60Hz Internal Driver

Options: Occupancy Control, Emergency , Dimmable (1-10V), DALI, Rooted/Flanged, Symmetric/Asymmetric, Different Heights.

Manufactured: EU.

Product Compliance: EN 60598, CE.

DIMENSIONS

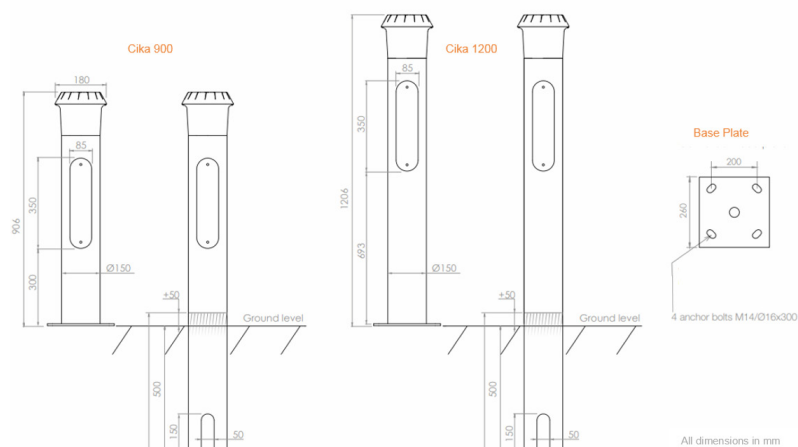


APPLICATION GUIDE

Cika Bollard 14w LED Symmetric Optic

Height: 900mm

Contours in Lux

M. Factor: 1

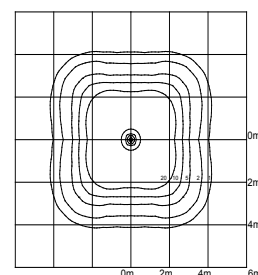

COLOUR GUIDE



ORDERING CODE

Wattage	Type	Code	Details	Lumens*
10w	8 LED	5CKA06LGA	Cika Bollard 900mm, Flanged, Symmetric, 350mA driver, 4K	989 lm
14w	8 LED	5CKA07LGA	Cika Bollard 900mm, Flanged, Symmetric, 500mA driver, 4K	1357 lm
19w	8 LED	5CKA08LGA	Cika Bollard 900mm, Flanged, Symmetric, 700mA driver, 4K	1816 lm
19w	16 LED	5CKA10LGA	Cika Bollard 900mm, Flanged, Symmetric, 350mA driver, 4K	1977 lm
26w	16 LED	5CKA11LGA	Cika Bollard 900mm, Flanged, Symmetric, 500mA driver, 4K	2714 lm

* Lumen output may vary slightly depending on the optic used

OPTIONS

RAL: Pls specify
HGT: Pls specify Height
DALI : DALI Dimmable
1-10V: 1-10V Dimmable
CLO: Constant Lumen Output
PRO: Programmed Dimming
ASY: Asymmetric Beam (A13)
3K: 3000K, Warm White