



Mini Confine

Recessed Wall light



Wall recessed luminaire suitable for pathways, driveways or similar applications.

Construction: Die-cast Aluminium with tempered glass lens. IP66. IK10.

Lens: Clear tempered glass lens 15mm.

Installation: External wall recessed with separate installation frame.

Finish: Stainless steel trim.

LED: 4w - 17w LED. 4K as standard, 3K on request.


Driver: Internal.

Options: DALI, 3K, ground recessed version also available.

Manufactured: EU.

Product Compliance: EN 60598, CE.

DIMENSIONS

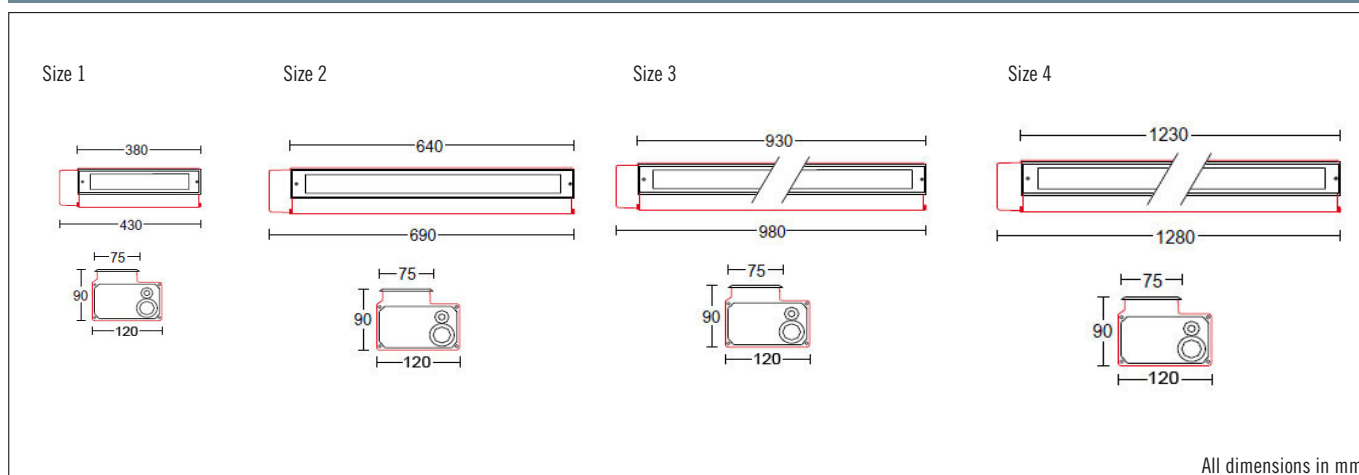

ORDERING CODE

Wattage	Type	Size	Code	Details	+Frame	Lumens*
4w	LED	1	G1179.BGXA400	Mini Confine, 4K, LED driver integral	GAC603	571 lm
9w	LED	2	G1180.LVXA400	Mini Confine, 4K, LED driver integral	GAC604	1147 lm
13w	LED	3	G1181.BRXA400	Mini Confine, 4K, LED driver integral	GAC605	1713 lm
17w	LED	4	G1182.LRXA400	Mini Confine, 4K, LED driver integral	GAC606	2284 lm

*Source lumens

OPTIONS

3K: 3000K, Warm White
DALI: DALI on request

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 402

Veelite