



Edge Wall Series

Recessed Wall Light



Wall recessed luminaire suitable for pathways, stairs, passages or similar applications.

Construction: Die-cast Aluminium with tempered glass lens. IP67. IK07.

Lens: Diffused glass lens 3mm.

Installation: External wall recessed with separate installation frame.

Finish: White, Light or Dark Grey or Stainless Steel trim.



LED: 0.5w to 12w LED. 4000K as standard, 3000K on request.

Driver: Remote, 24 V DC or 700 mA Driver required.



Options: DALI.

Manufactured: EU.


Product Compliance: EN 60598, CE, UKCA.



APPLICATION GUIDE



DIMENSIONS

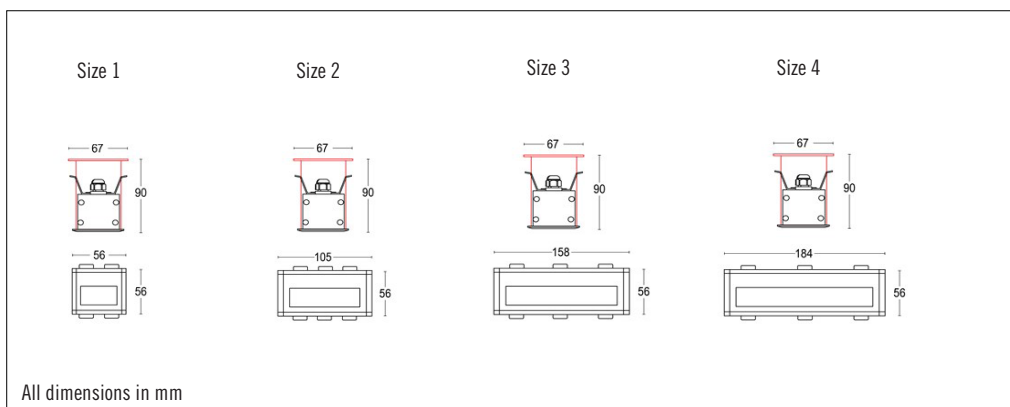

OPTIONS

3K: 3000K, Warm White
.01: White Finish
.05: Dark Grey Finish
.19 Light Grey
DALI: DALI on request

ORDERING CODE

Wattage	Type	Size	Code	Details	+Frame	Lumens*
0.5w	LED	1	G2003.BAAT400	Recessed Wall Light, Asymmetric, 4K	GAC543	20 lm
1.5w	LED	2	G2004.AHAT400	Recessed Wall Light, Asymmetric, 4K	GAC544	66 lm
2.5w	LED	3	G2005.CAAT400	Recessed Wall Light, Asymmetric, 4K	GAC545	111 lm
12w	LED	4	G2007.CAWT400	Recessed Wall Light, Asymmetric, 4K	GAC663	627 lm

ORDERING CODE - Remote Driver

14w	-	-	GAC146.0024014FN-67	Remote Driver 24 V DC	-	For Size 1-3
40w	-	-	GAC088.0024040FN-67	Remote Driver 24 V DC	-	For Size 1-3
14w	-	-	GAC084.0700014FN-67	Remote Driver 700 mA	-	For Size 4

*Luminaire lumens and total circuit wattage shown.