




Compact Wall

External lighting



Modern LED Wall Light, up or down light, with various beam options.

Construction: Die cast Aluminium Housing with 5mm glass lens. IP65. IK08.

Installation: Surface Mounting.

Finish: Light Grey RAL 9006 as standard. Dark Grey or white on request.

LED: 6w Downlight or 12w Uplight and Downlight. (9w or 18w respectively with remote Driver). 4000K (3000K on request).


Option: Narrow or Medium Beam, RAL, Remote Driver.

Manufactured: EU.

Product Compliance: EN 60598; CE, UKCA.

DIMENSIONS

All dimensions in mm.

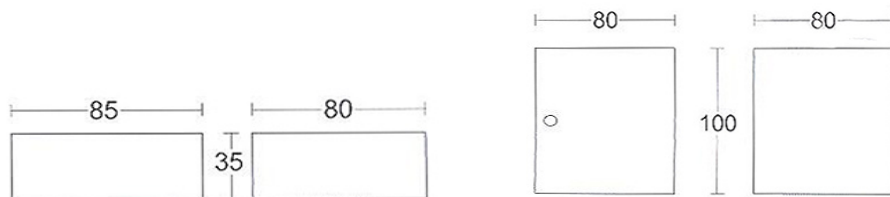

Size 1

Size 2



ORDERING CODE

Wattage	Type	Size	Code	Description	BUG Rating	Lumens*
6w	LED	1	G1143.AHST400	Wall Downlight - 18° Beam, 4K	B1-U0-G0	580 lm
6w	LED	1	G1143.AHFT400	Wall Downlight - 40° Beam, 4K	B1-U0-G0	580 lm
6w	LED	2	G1169.AHST400	Wall Downlight - 18° Beam, 4K	B1-U0-G0	580 lm
6w	LED	2	G1169.AHFT400	Wall Downlight - 40° Beam, 4K	B1-U0-G0	580 lm
12w	LED	2	G.1144.BRST400	Wall Up & Downlight - 18° Beam, 4K	B1-U3-G0	2 x 580 lm
12w	LED	2	G.1144.BRFT400	Wall Up & Downlight - 40° Beam, 4K	B1-U3-G0	2 x 580 lm

* Source Lumens. Note Higher Wattages available with Remote Driver. BUG ratings are the same for 3000K version.

OPTIONS

3K: 3000K, Colour Temperature

.19: Light Grey Finish

.05: Dark Grey Finish

DALI: Dali (remote driver only)

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 418

Veelite