



Classidra Series

External lighting



Illuminated Architectural Lighting Column suitable for plaza and pedestrian areas. Also available in Bollard height.

Features Tubular Base section and Top section, with narrow (blade shaped) mid section. LED is in top section.

Construction: Die cast and extruded aluminium construction. IP65. Internal LED Driver.

Height 4m as standard, or 2.4m for Mini version, or 1.1m for Bollard version.

Installation: Flanged, with J-Bolt Kit.

Finish: Light Grey RAL 9006 finish as standard. Dark Grey on request.


LED: Available in 25w or 48w LED. 4K as standard, 3K on request.

Options: Also available as 1.1m high Bollard.


Manufactured: EU.

Product Compliance: EN 60598, CE, UKCA.

Veelite



DIMENSIONS

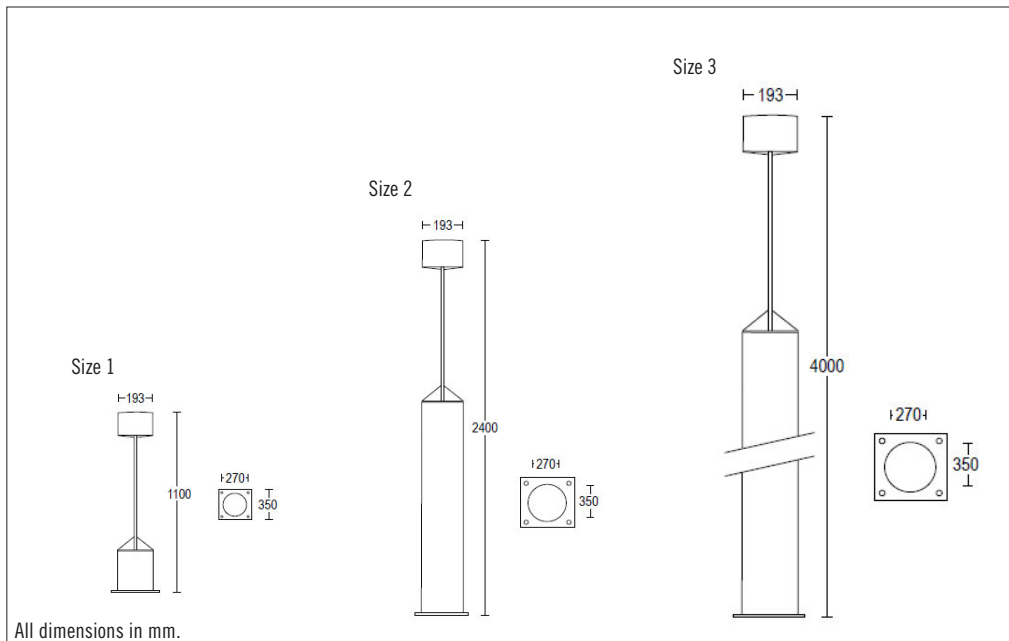

APPLICATION GUIDE

Classidra Column


4m height

25w 2 LED

Contours in Lux

M. Factor = 0.9

Wide Beam



ORDERING CODE

Wattage	Type	Size	Code	Details	Lumens
25w	LED	1	G1506.CGXT400	Miniclassidra Bollard, 4K	3146 lm
25w	LED	2	G1507.CGXT400	Miniclassidra Luminaire, 4K	3146 lm
48w	LED	3	G1501.LFXT400	Classidra Luminaire, 4K	6292 lm
-	-	-	GAC429	Flange Plate with J-Bolts	-

OPTIONS

3K: 3000K, Warm White

.05: Dark Grey Finish

.19: Light Grey Finish

DALI: DALI on request

Flange Plate, with J-Bolts

