



LED Parklite

Internal lighting



Low Profile LED luminaire for use in low height areas designed to achieve high levels of illumination with the lowest energy/maintenance costs.

Construction: Aluminium Housing with Polycarbonate lens. IP65.

Finish: Grey as standard. Other colours on request.

Wattage: 36w and 70w LED. 4K as standard, 3K on request.

Options:

Dimmable:

DALI

Switch Dimming


1-10V Dimming

Emergency (internal for 36w, remote for 70w)

Manufactured: Ireland.

Product Compliance: EN 60598, CE.

Replaceable LED Modules

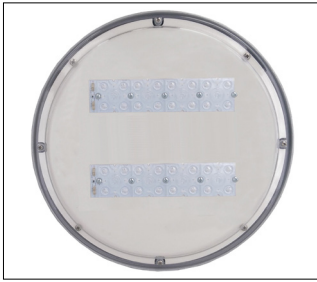


Let the easy hanger plate support Parklite while wiring.




Tighten the set screw and installation is complete



Pendant mounted box (Consult factory)

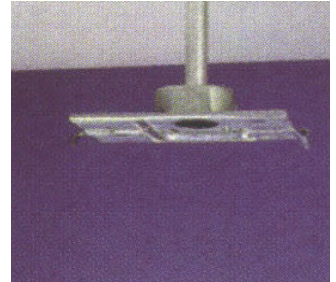


DIMENSIONS

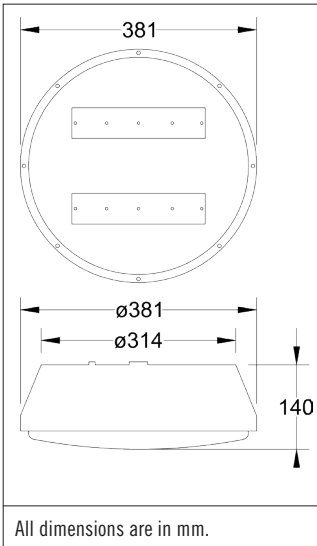

APPLICATION GUIDE - 36W LED

Spacing (A)	2 Rows	3 Rows	Version - 36w LED
4.80m	95 (0.54)	-	Ceiling - 2.50m
7.20m	-	92 (0.77)	Mounting Height - 2.5m
9.60m	-	76 (0.69)	Reflectances - 0.5/0.5/0.2


Average Lux Levels, based on maintained lumens, uniformity shown in brackets.

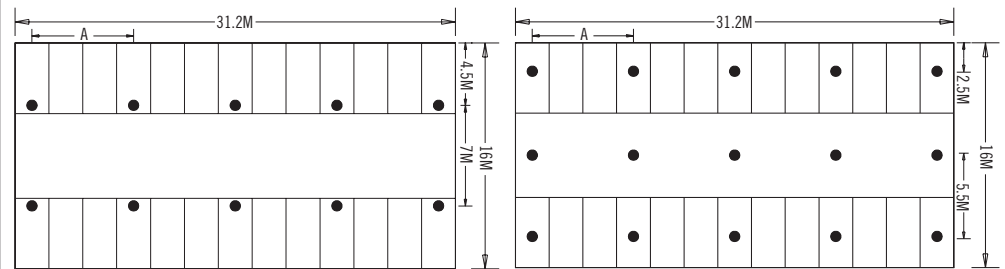

APPLICATION GUIDE - 70W LED

Spacing (A)	2 Rows	Version - 70w LED
4.80m	187 (0.54)	Ceiling - 2.50m
7.20m	131 (0.61)	Mounting Height - 2.5m
9.60m	103 (0.49)	Reflectances - 0.5/0.5/0.2

Average Lux Levels, based on maintained lumens, uniformity shown in brackets.

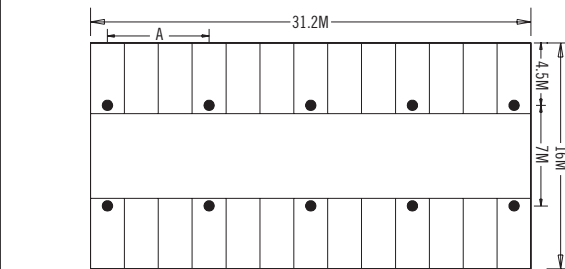

OPTIONS

TE: With top entry wiring
PEN: Pendant mounting
RAL: Pls specify
TW: With thru-wiring
3K: 3000K
DIM: 1-10v dimming
SDM: Switch dimming
DALI: DALI

ORDERING CODE

Wattage	Type	Code	Description	Lumens
36w	16 LED	3RPK20LGA	LED Parklite, 36w LED, Symmetric	4080 lm
70w	32 LED	3RPK21LGA	LED Parklite, 70w LED, Symmetric	8160 lm