




External Bulkhead

External Lighting



Wall or ceiling mounted LED luminaire available in either round or eyelid frame versions.

Construction: Die-cast aluminium housing with opal PC diffuser.
IP65. IK08.

Finish: Black Finish as standard.

LED: 10W LED, 4000K as standard
2700K/3000K on request.

Driver: Internal. 220-240V AC, 50/60Hz

Options: Occupancy sensor, emergency backup.

Product Compliance: EN 60598; CE.




Ring version



Eyelid version



DIMENSIONS

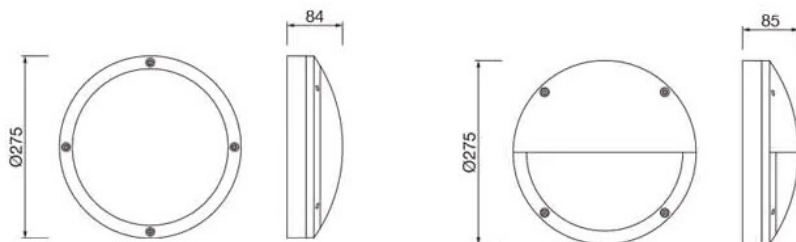

All Dimensions in mm

ORDERING CODE

Wattage	Type	Code	Details	Lumens
10w	LED	5601.EXT006	External Bulkhead, Ring Frame, 4000K	1000 lm
10w	LED	5601.EXT007	External Bulkhead, Eyelid Frame, 4000K	700 lm

APPLICATION GUIDE

External Bulkhead - Ring Frame


10w LED

2.5m Mounting Height

Lux levels on ground

M. Factor = 0.85

Spacings	Lux
5m	17 (7)
10m	8 (4)
15m	5 (1.4)
20m	4 (0.6)



Readings in Lux on ground
(Minimums shown in brackets)

OPTIONS

3K: 3000K

MS: Motion Sensor

EM: Emergency