




Retail LED Series

Internal lighting



The Retail Series LED is designed for use for in retail, commercial or industrial open areas, canteens, etc. It is available in 3 sizes.

Suitable for use with sensors (integral or remote) for occupancy or daylight control.

Construction: Aluminum with Tempered Glass Lens. IP20. Wide Beam Optic as standard (80° x 100°)

Mounting: Suspended.

Finish: Silver and White.

LED: 60w - 400 W LED. 4K. Nichia.
Ambient temperature: -25°C to 40°C.

Lifetime: L70 > 50,000 hrs.

Sensor controller system: An optional narrow beam occupancy sensor can be mounted on the luminaire.


Typically, fittings will remain on while area of sensor coverage is occupied, then switch off automatically, after preset time delay when area is vacated.

Dimensions:

- 336 x 307 x 61mm (max 90 W)
- 621 x 307 x 61mm (max 240 W)
- 906 x 307 x 61mm (max 400 W)

Options: Wide 60° Beam or Narrow 30° Beam. 3K or 5K Colour Temperature.

Product Compliance: EN 60598; CE.

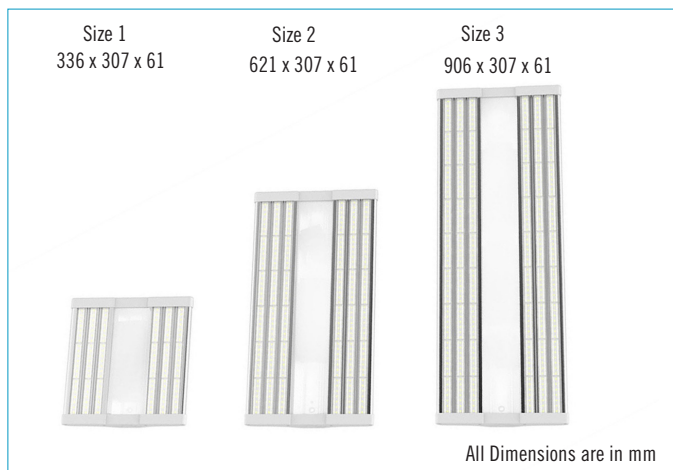

ORDERING CODE

Wattage	Code	Size	Description	Lumens*
60w	3RTL10060	1	Retail Series LED 4K	6,800 lm
90w	3RTL10090	1	Retail Series LED 4K	10,800 lm
120w	3RTL10120	2	Retail Series LED 4K	14,100 lm
150w	3RTL10150	2	Retail Series LED 4K	17,000 lm
180w	3RTL10180	2	Retail Series LED 4K	21,200 lm
240w	3RTL10240	2	Retail Series LED 4K	27,600 lm
300w	3RTL10300	3	Retail Series LED 4K	35,900 lm
400w	3RTL10400	3	Retail Series LED 4K	47,100 lm

* Standard Version Lumen Output. Lumen output will change depending on optic used. 5K Version provides approx 5% more lumens.

OPTIONS

DALI: DALI
30B: 30 x 100 Beam
60B: 60 x 120 Beam
3K: 3000 ⁰ K
5K: 5000 ⁰ K