



Sportslite LED

External Lighting



LED floodlight, designed for the illumination of Smaller Pitches, Training Pitches, Tennis Courts etc.

Construction: Die-cast Aluminium LED housing with Tempered Glass Lens. IP66. IK08. IP67 Driver is installed in a separate box behind LED module for easy access.

Mounting: Via Adjustable galvanised steel U-bracket. Tilt in 15° Increments, on top of T-Bar, or front of T-bar. Not tiltable when mounted under T-bar.

Optics: Asymmetric Beam (55° Forward) as standard. Choice of 4 other beams on request - Spot (15°), Medium (30°), Wide, and Asymmetric A10 (10° Forward).

LED: 300w, 5000K Ra70 as standard. 4000K on request.
Lifetime: L70 B10 > 100,000 hours 25°C

Driver: AC 100 -240V 50/60 Hz, Class I. Lifetime (<10% failures) 100,000 hours @ 30°C

Mains Surge Protection: 6kV line-line, 10kV line-earth.


Finish: Black as standard.

Options: Various Beam Angles, CCT, DALI, 1-10V Dimming.

Product Compliance: EN 60598, CE.



OPTICS

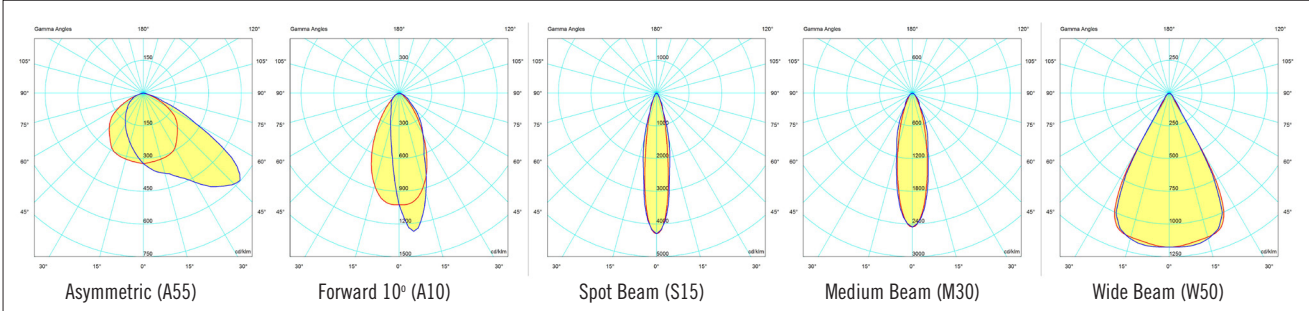

ORDERING CODE

Wattage	Type	Code	Description	Lumens*
300w	LED	5SP1300GA	LED Floodlight with U Bracket, 5K, Asymmetric	42,000 lm

* Lumen output will vary slightly depending on the optic used

OPTIONS

4K:	4000K
A10:	10° Forward Beam
S15:	15° Spot Beam
M30:	30° Medium Beam
W50:	50° Wide Beam
DALI:	DALI Driver

DIMENSIONS

300w
Weight: 12kg
Windage @ 90°: 0.12m²
Windage @ 0°: 0.09m²
Minimum Tilt 0°

All dimensions in mm

