





Luma Wall Light

External lighting



Modern LED Wall Light, in 2 sizes, with various beam options.

Construction: Die cast Aluminium Housing with tempered glass Lens. IP65. IK08.

Installation: Surface Mounted.

Finish: Light Grey RAL 9006 as standard. Other colours on request.

LED: 6W, 10W, 12W or 25W. 4000K as standard. 2700K or 3000K on request.

Driver: 220-240V AC 50/60Hz. Power Factor > 0.9.


Optics: Asymmetric R02 optic as standard. Forward Throw, Type R03 or Symmetric on request. Size 1 also available with Frosted Lens (Symmetric beam).

Option: Optics, RAL, 1-10V or DALI Driver.

Product Compliance: EN 60598; CE.

DIMENSIONS


All dimensions in mm.

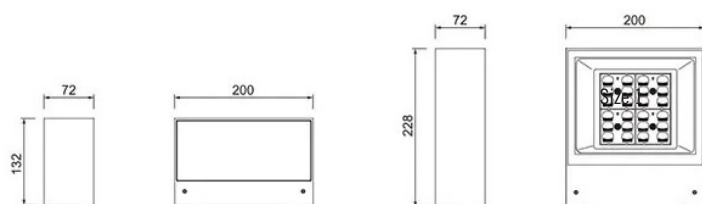

Size 1

Size 2


Available Optics

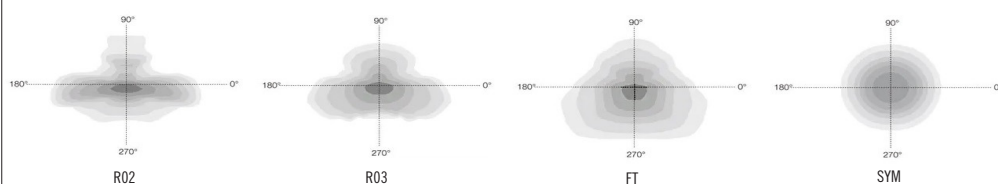

Size 1 (with Frosted Lens)



Size 1 (with Clear Lens)



Size 2 (Clear Lens Only)

ORDERING CODE

Wattage	Type	Size	Code	Description	Lumens*
6w	LED	1	5LM006LGA	Luma Wall Light, 4000K, Asymmetric R02 Optic with Clear Lens	850 lm
10w	LED	1	5LM010LGB	Luma Wall Light, 4000K, Symmetric with Frosted Lens	775 lm
12w	LED	1	5LM012LGA	Luma Wall Light, 4000K, Asymmetric R02 Optic with Clear Lens	1700 lm
25w	LED	2	5LM025LGA	Luma Wall Light, 4000K, Asymmetric R02 Optic with Clear Lens	3650 lm

OPTIONS

3K: 3000K, Colour Temperature

27K: 2700K Colour Temperature

RAL: Colour Finish

1-10: 1-10V Dimming

DALI: Dali

R03: R03 Asymmetric Optic

FT: Forward Throw Optic

SYM: Symmetric Optic

FL: Frosted Lens (Size 1 Only)

EM: Emergency 3Hr (Size 2 Only)

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 665

Veelite