



Polo Wall Light

External lighting



LED compact wall luminaire.

Construction: Die-cast aluminum housing with polycarbonate lens. IP66. IK10.

Finish: Black as standard.


LED: 15w - 45w LED. 4000K CRI80 as standard, Other CCT on request.
Lifetime L70 > 100,000 hours.

Driver: Internal LED driver. 220-240 VAC, 50/60 Hz. Power Factor > 0.92

Options: Integrated photocell, emergency lighting, Cut off version (Polo Flat).


Product Compliance: EN 60598; CE.

DIMENSIONS

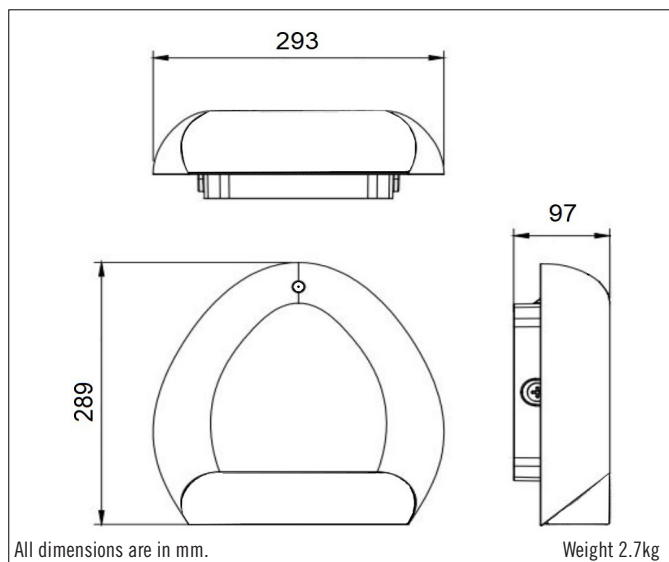

APPLICATION GUIDE

Polo Wall Light 25w
2.5m Height
Contours in Lux
M. Factor = 0.90



Polo Flat



Polo



ORDERING CODE

Wattage	Type	Code	Description	Lumens
15w	LED	5POL00150	Polo Wall Light 4000K	2025
25w	LED	5POL00250	Polo Wall Light 4000K	3250
35w	LED	5POL00350	Polo Wall Light 4000K	4800
45w	LED	5POL00450	Polo Wall Light 4000K	5850

OPTIONS

EM: Emergency
MPC: Mini Photocell
3K: 3000K, Warm White
PLF: Polo Flat

BUG Rating

Wattage	Type	Code	BUG 4000K	BUG 3000K	BUG 2700K
15w	LED	5POL00150	B1-U3-G2	B1-U3-G2	B1-U3-G2
25w	LED	5POL00250	B1-U3-G2	B1-U3-G2	B1-U3-G2
35w	LED	5POL00350	B1-U4-G3	B1-U4-G3	B1-U3-G3
45w	LED	5POL00450	B1-U4-G3	B1-U4-G3	B1-U4-G3

Note: BUG rating is for luminaire installed normally with no tilt. If luminaire is tilted BUG rating will change.

Note: Lumen output for 3000K is about 7% less than 4000K. Lumen output for 2700K is about 18% less than 4000K.