



Zen Bollard

External lighting



Zen Bollard is suitable for paths, gardens or plaza areas.

Construction: Cast Aluminium Head, IP65, IK08. Extruded Aluminium Shaft. 1m high.

Lens: Clear PMMA Lens.

Installation: Flanged as standard.


Finish: Light grey RAL 9006 as standard. Other colours on request.

LED: 15w- 25w, Lumiled Luxeon 3030 LEDs. Neutral white 4000K as standard. Lifetime L80 - 50,000 hours.


Driver: 220-240V AC 50/60 Hz.

Product Compliance: EN 60598, CE.

DIMENSIONS

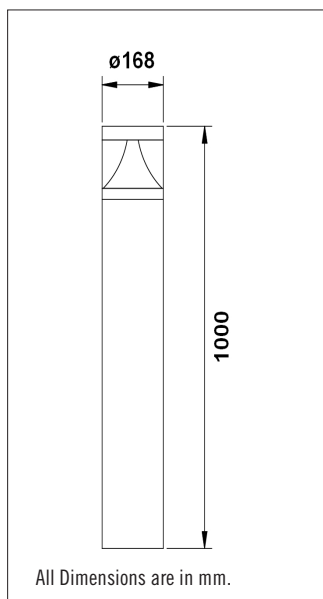

APPLICATION GUIDE

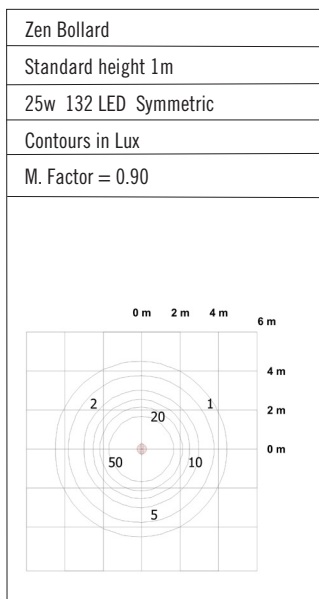

OPTIONS

RAL: Pls specify
DALI:Dali
EM: Emergency

ORDERING CODE

Wattage	Type	Code	Details	Lumens
15w	LED	5ZNB00015	Zen Bollard, 1m high, flanged, 4000K	1050
25w	LED	5ZNB00025	Zen Bollard, 1m high, flanged, 4000K	1650