





Vero Bollard

External lighting



Bollards with minimal design available in various sizes and heights. Designed to illuminate avenues, walkways, pathways, gardens and parks without glaring.

Construction: Die-cast aluminum housing. Internal LED Driver. IP65, IK09.

Lens: Tempered glass 4mm.

Installation: Flanged, with Anchor Bolts.

Finish: Light Grey RAL 9006 as standard. Anthracite Grey or other finishes on request.


LED: Available in 3w-9w LED. 4000K as standard, 2700K or 3000K on request.

Driver: 220-240V AC 50/60 Hz

Options: DALI, RAL Colours on request, 3000K on request


Manufactured: EU.

Product Compliance: EN 60598, CE.




DIMENSIONS


Size 1




Size 2



Size 3



Size 4

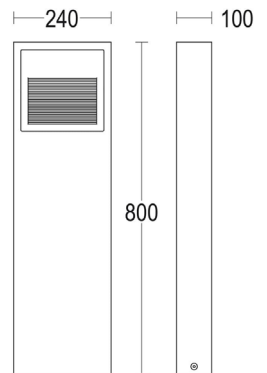

All dimensions are in mm

ORDERING CODE

Wattage	Type	Code	Size	Description	Lumens*
3w	LED	G1149.BGXP400	1	Vero Bollard, 4K	390 lm
3w	LED	G1139.BGXP400	2	Vero Bollard, 4K	390 lm
9w	LED	G1150.CAXP400	3	Vero Bollard, 4K	1170 lm
9w	LED	G1140.CAXP400	4	Vero Bollard, 4K	1170 lm
-	-	GAC247	-	Anchor Bolt Kit	

*Source lumens

OPTIONS

RAL: Pls specify
.05: Anthracite Grey
.19: Light Grey Finish
DALI: DALI on request (9w only)
3K: 3000K, Warm White
27K: 2700K Warm White

Anchor Bolt Kit

