



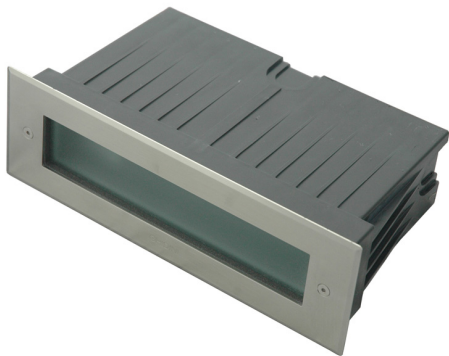

Margen Series

Recessed Wall lights



Wall recessed luminaire suitable for pathways, driveways or similar applications.

Construction: Die-cast Aluminium with tempered glass lens. IP66. IK06 (size 3, IK07).

Lens: Frosted glass lens 4mm, except size 3 (5mm).

Installation: External wall recessed with separate installation frame.

Finish: Light Grey RAL 9006, Dark Grey or stainless steel trim.

LED: 6.2w or 13w LED. 4K as standard, 3K on request.

Driver: Internal.




Options: DALI.

Manufactured: EU.


Product Compliance: EN 60598, CE, UKCA.



Application Guide



DIMENSIONS

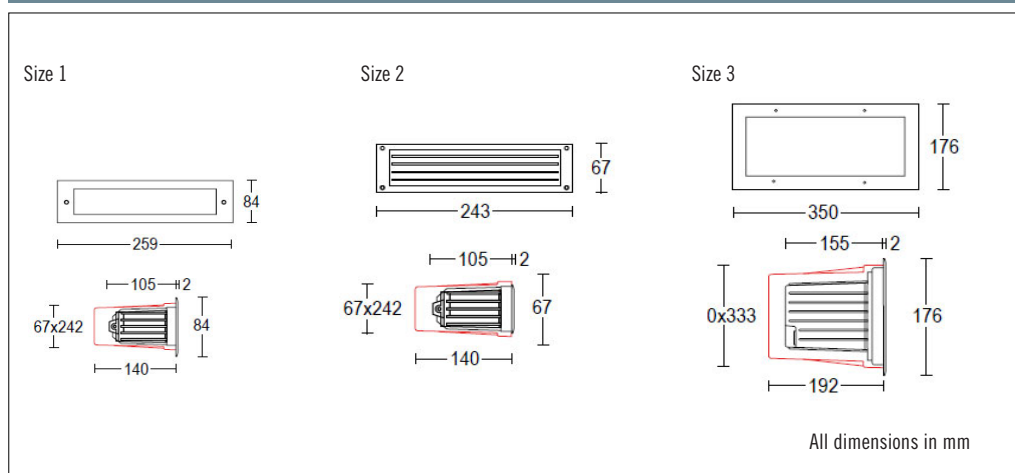

OPTIONS

3K: 3000K, Warm White
.05: Dark Grey Finish
.19: Light Grey Finish
.15: Stainless Steel Trim Finish

ORDERING CODE

Wattage	Type	Size	Code	Details	+Frame	Lumens*
6.2w	LED	1	G6503.AHXA400	Recessed Wall Light, 4K	GAC022	864 lm
6.2w	LED	2	G6507.AHXA400	Recessed Wall Light, with grill, 4K	GAC022	864 lm
13w	LED	3	G5629.BRXA400	Recessed Wall Light, 4K**	GAC024	2140 lm

*Source lumens

**Finish: Stainless Steel Trim only