



Smartlite Series

External Lighting



Energy efficient wall mounted luminaire suitable for perimeters, landscapes and yards. Option for built in sensors and/or low output setting.

Construction: Aluminium base with a polycarbonate body. IP65.

Finish: Black finish.

LED: 28-50w LED, 4000K as standard.

Driver: 220-240V, 50/60Hz

Options:

1) Occupancy Sensor. Typical range 6m (Sensitivity can be reduced) and delay of 2 minutes (adjustable 10 seconds to 5 minutes), with default to off.

2) As 1) above, except default to 20% light output (Hi/Low version) - 28w only.

3) Photocell.


4) Emergency

Manufactured: Ireland.


Product Compliance: EN 60598; CE.

Veelite

DIMENSIONS

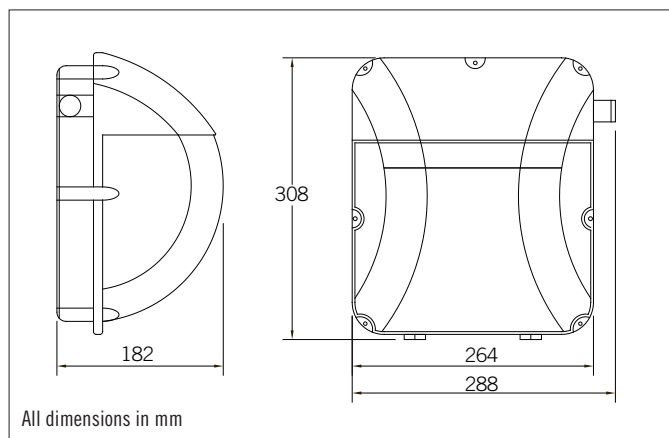

SENSOR COVERAGE - (2m mounting height)

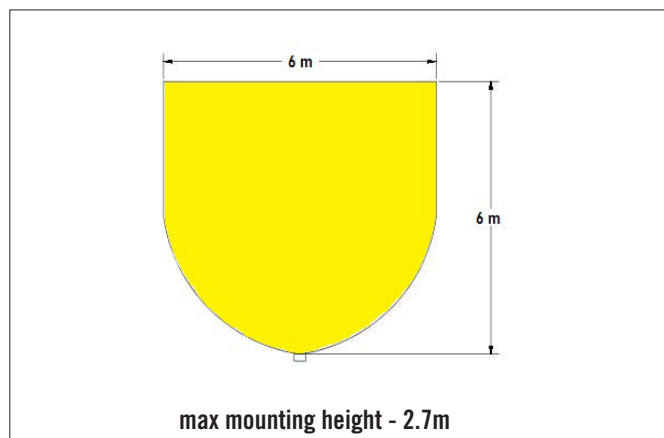

ORDERING CODE

Wattage	Type	Code	Description	Lumens
28w	LED*	5SLT25LBA	with LED Module	2650 lm
28w	LED*	5SLT25LBB	with LED Module & Photocell	2650 lm
28w	LED*	5SLT25LBC	with LED Module, Photocell & Motion Sensor (On/Off)	2650 lm
28w	LED	5SLT25LBD	with LED Module & Motion Sensor (Hi/Low)	2650 lm
28w	LED	5SLT25LBE	with LED Module, Photocell & Motion Sensor (Hi/Low)	2650 lm
37w	LED*	5SLT31LBA	with LED Module	3900 lm
37w	LED*	5SLT31LBB	with LED Module & Photocell	3900 lm
37w	LED*	5SLT31LBC	with LED Module, Photocell & Motion Sensor (On/Off)	3900 lm
50w	LED*	5SLT50LBA	with LED Module	5610 lm
50w	LED*	5SLT50LBB	with LED Module & Photocell	5610 lm
50w	LED*	5SLT50LBE	with LED Module, Photocell & Motion Sensor (On/Off)	5610 lm

* Emergency option available



APPLICATION GUIDE

SmartLite	
28w LED	
2.5m Mounting Height	
Lux levels on ground	
M. Factor = 0.85	
Spacings	Lux
5m	28 (1)
10m	14 (1)
15m	9 (0)
20m	7 (0)
Readings in Lux on ground (Minimums shown in brackets)	

OPTIONS

3K: 3000K
EM: Emergency *