



Compact Groundlite Series



Compact Ground recessed fitting for lighting walls, facades, pathways, etc.

Construction: Die-cast aluminium housing, IP68, IK10, 2mm Lip above Ground Level.

Lens: 15mm Tempered Clear Glass lens.

Installation: Ground recessed. Drainage area of 300mm required. Separate Frame required for Installation.
Max static pressure load of 2500kg.

Reflector: Narrow, medium, wide or asymmetric beam.


Finish: Stainless steel trim.

LED: 12w-26w LED. 4000K as standard, 3000K on request.

Driver: Internal, 220-240V AC 50/60Hz

Options: Square or round stainless steel trim, DALI, anti-slip glass lens.


Ceiling and wall recessed versions also available. See separate Leaflet.



Warning: Groundlights can be a glare, slip, trip or burn hazard. Vandalism or accidental breakage can result in electrical, glass or trip hazard. Locate to avoid or minimise these hazards.

Manufactured: EU.

Product Compliance: EN 60598; CE.





Veelite




Round Trim Version



Square Trim Version



DIMENSIONS

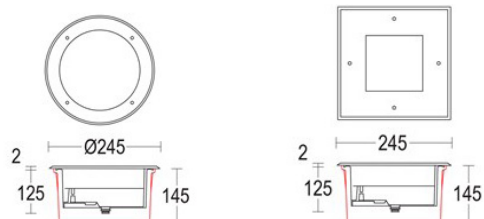

All dimensions in mm.

ORDERING CODE

Wattage	Type	Round Version	Square Version	Details	Lumens*
12w	LED	G5329.BRAT400	G5323.BRAT400EN	** Asymmetric Beam, 4K	1573 lm
12w	LED	G5329.BRST400	G5323.BRST400EN	Narrow Beam 14°, 4K	1573 lm
12w	LED	G5329.BRMT400	G5323.BRMT400EN	Medium Beam 42°, 4K	1573 lm
12w	LED	G5329.BRFT400	G5323.BRFT400EN	Wide Beam 58°, 4K	1573 lm
18w	LED	G5329.BUAT400	G5323.BRAT400EN	** Asymmetric Beam, 4K	2205 lm
18w	LED	G5329.BUST400	G5323.BUST400EN	Narrow Beam 14°, 4K	2205 lm
18w	LED	G5329.BUMT400	G5323.BUMT400EN	Medium Beam 42°, 4K	2205 lm
18w	LED	G5329.BUFT400	G5323.BUFT400EN	Wide Beam 58°, 4K	2205 lm
26w	LED	G5329.CGAT400	G5323.CGAT400EN	** Asymmetric Beam, 4K	3012 lm
26w	LED	G5329.CGST400	G5323.CGST400EN	Narrow Beam 14°, 4K	3012 lm
26w	LED	G5329.CGMT400	G5323.CGMT400EN	Medium Beam 42°, 4K	3012 lm
26w	LED	G5329.CGFT400	G5323.CGFT400EN	Wide Beam 58°, 4K	3012 lm
-	-	GAC017	GAC017	Installation Frame	-

*Source lumens

** 64° x 82° x 20°

OPTIONS

3K: 3000K, Warm White

DALI: DALI on request

AGL: Anti-slip glass lens