




Spia Wall Series



Wall recessed fitting in 4 sizes, with multiple finishes available.

Manufactured: EU.

Construction: Die-cast aluminium housing. IP67. IK10.

Product Compliance: EN 60598; CE.

Lens: Tempered glass lens. Diffuse as standard, clear on full louvred versions.

Installation: Wall recessed.


LED: 4w-13w LED. 4K as standard, 3K on request.

Finish: Stainless steel trim as standard, except RAL 9006 Grey on Louvre and half Louvre version.


Driver: Internal as standard, except remote on 6w versions.

Options: Square or round stainless steel trim. Full, half or no Louvre.

Canopy and ground recessed versions also available - see separate brochure.

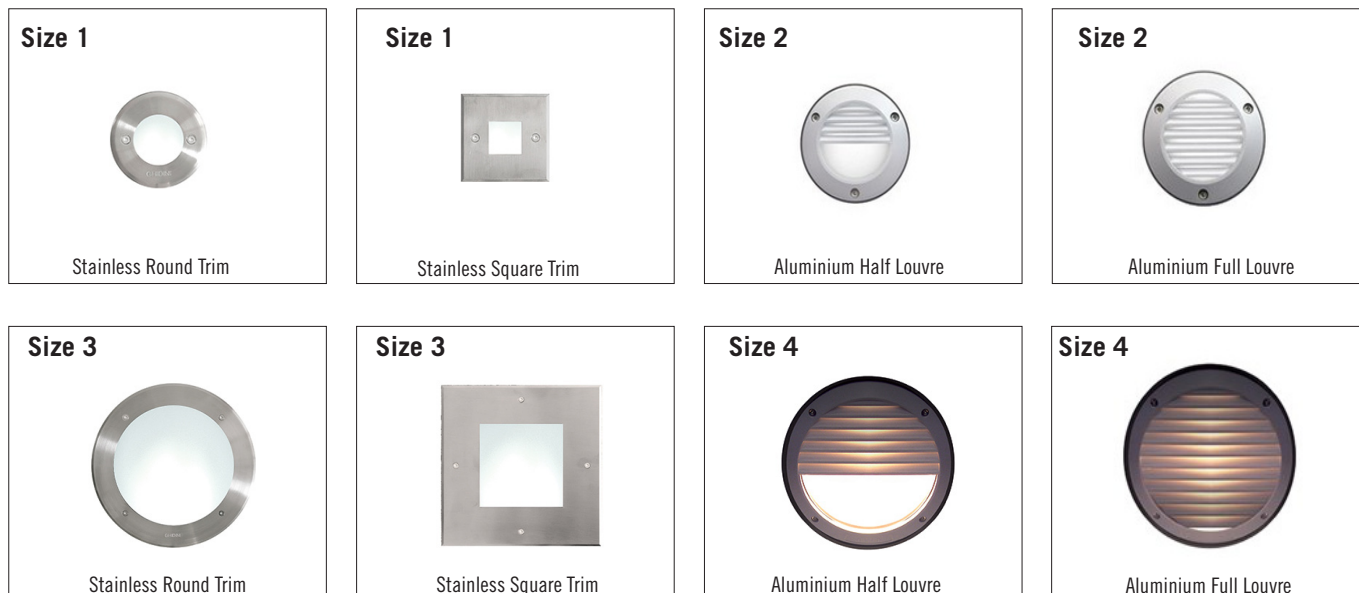

DIMENSIONS

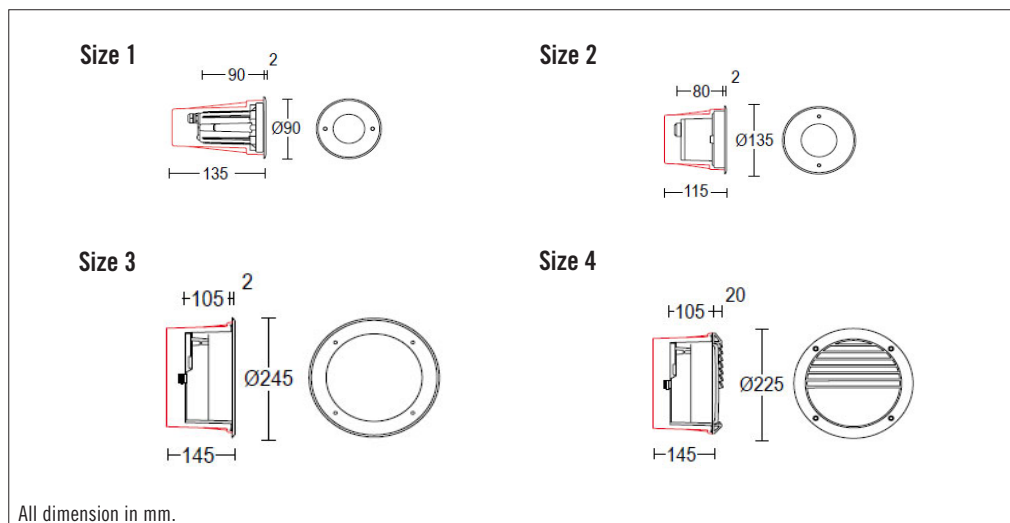

OPTIONS

3K: 3000K, Warm White
.05: Dark Grey Finish
.19: Light Grey Finish

ORDERING CODE

Watt-age	Type	Size	Stainless Round Trim	Stainless Square Trim	Aluminium Half Louvre*	Aluminium Full Louvre*	Details	+add Frame	Remote Driver	Lumens*
4w	LED	1	G5293.BGXA400	G5290.BGXA400	-	-	Wide Beam, 4K, Internal Driver	GAC013	NA	440 lm
6w	LED	1	G5293.AHFA400	G5290.AHFA400	-	-	82° Wide Beam, 4K, 350mA Driver - Remote**	GAC013	GAC620	877 lm
7w	LED	2	G5296.AHXA400	G5299.AHXA400	G5297.AHXA400	G5298.AHXA400	82° Wide Beam, 4K, Internal Driver	GAC015	NA	918 lm
13w	LED	3	G5301.BRXA400	G5308.BRXA400	-	-	82° Wide Beam, 4K, Internal Driver	GAC017	NA	2140 lm
13w	LED	4	-	-	G5305.BRXA400	G5322.BRAA400	Wide Beam, 4K, Internal Driver	GAC017	NA	2140 lm

*Source lumens

**Louvre and half Louvre versions are round only and RAL 9006 Grey finish.