




Spia Canopy Series



Ceiling recessed LED fitting for canopy lighting.

Construction: Die-cast aluminium housing, with stainless steel trim.

Size 1, 2, 3 - IP67, IK07

Size 4, 5 - IP65, IK10

Lens: Tempered glass lens.

Size 1 - 8mm

Size 2, 3 - 5mm

Size 4, 5 - 12mm

Installation: Ceiling recessed.

Finish: Stainless steel trim as standard.
Painted on request.

LED: 6w - 32w LED. 4K as standard. 3K on request.




Driver: Internal or remote (see ordering guide).

Options: Round or Square Trim, 3K option, DALI.


Wall and ground versions also available - see separate leaflets.

Manufactured: EU.

Product Compliance: EN 60598, CE.



DIMENSIONS

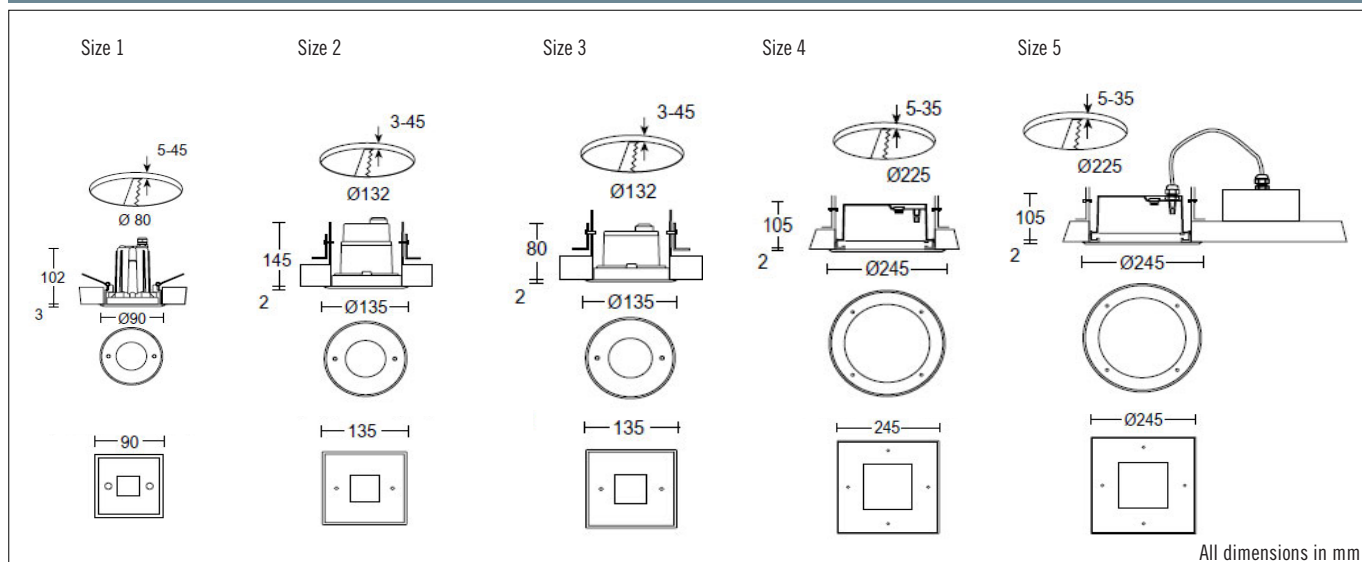

ORDERING CODES

Wattage	Type	Size	Code - Round Trim	Code - Square Trim	Beam	Details	+Remote Driver**	Lumens*
6w	LED	1	G5955.AHMT400	G5947.ETMT400	40°	Micro Spia, 4K	GAC021	877 lm
9w	LED	1	G5955.CAMT400	G5947.CAMT400	40°	Micro Spia, 4K	GAC083	1218 lm
6.5w	LED	2	G6621.AHFT400	G6623.AHFT400	58°	Midi Spia, 4K, Internal Driver	-	918 lm
18w	LED	3	G6624.BUFT400	G6625.BUFT400	58°	Midi Spia, 4K, Remote Driver	GAC207	2205 lm
12w	LED	4	G5317.BRFT400	G5309.BRFT400	58°	Spia, 4K, Internal Driver	-	1573 lm
18w	LED	4	G5317.BUFT400	G5309.BUFT400	58°	Spia, 4K, Internal Driver	-	2205 lm
26w	LED	4	G5317.CGFT400	G5309.CGFT400	58°	Spia, 4K, Internal Driver	-	3012 lm
32w	LED	5	G5317.ECFT400	G5309.ECFT400	58°	Spia, 4K, incl Remote Driver	-	3781 lm

*Source lumens

**Please specify whether IP20 or IP67 driver required

Options

3K: 3000K, Warm White

DALI: DALI on request

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 949

Veelite