





Pathway Series

Ground Light



Compact in-ground recessed light for pathways or similar applications. Light is diffused from the sides out of 1, 2 or 28 apertures in the aluminium trim. Raised grate creates light pattern on the ground.

Warning: Groundlights can be a glare, slip, trip or burn hazard. Vandalism or accidental breakage can result in electrical, glass or trip hazard. Locate to avoid or minimise these hazards.

Construction: Die-cast aluminium housing. IP68. IK10.

Lens: Tempered clear glass lens.

Installation: In ground 300mm drainage area required. Separate Installation frame.

Finish: Light grey finish as standard. Dark grey on request.

LED: 1w - 20w LED. 4K as standard, 3K on request.

Driver: Internal.


Options: DALI, RAL colours on request, 3K, smaller version (see separate leaflet).

Manufactured: EU.

Product Compliance: EN 60598, CE.



DIMENSIONS

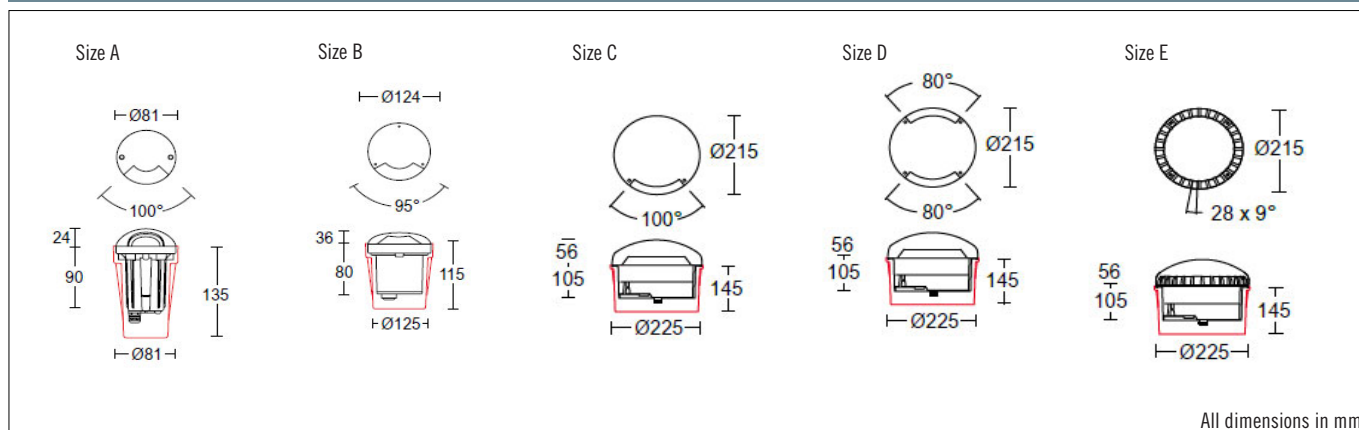

ORDERING CODE

Wattage	Type	Size	Code - 1 Beam	Code - 2 Beam	Code - 28 Beam	Details	+ Installation Frame	Lumens*
1w	LED	A	G5956.BAXT400	G5958.BAXT400	-	90° Beam (per aperture)	GAC013	130 lm
3w	LED	B	G6730.BGXT400	-	-	90° Beam (per aperture)	GAC018	288 lm
6w	LED	B	-	G6732.AHXT400	-	90° Beam (per aperture)	GAC018	2x288 lm
10w	LED	C	G5371.CAXT400	-	-	118° Beam (per aperture)	GAC017	1358 lm
20w	LED	D	-	G5373.FGXT400	-	118° Beam (per aperture)	GAC017	2x1358 lm
12w	LED	E	-	-	G5375.BRXT400	360° Beam	GAC017	1573 lm

OPTIONS

3K: 3000K, Warm White
.05: Dark Grey Finish
.19: Light Grey Finish
DALI: DALI on request

*Source lumens