




Segno

Groundlight



Compact sized recessed Groundlight in 3 sizes for LED illumination of exterior/ interior features, walls, steps, staircases, walkways, etc.

Construction: Die-cast Aluminium with glass lens. IP68. IK08.

Installation: Drainage area 300mm required and separate Installation Frame required.

Lens: Tempered Clear Glass lens 5mm.

Finish: Brushed stainless steel trim (316L).

LED: Available in 1w - 6w LED. 4K as standard, 3K on request.

Driver: Remote driver required (to be located in sealed IP rated housing).


Options: DALI, 3K.

Manufactured: EU.


Product Compliance: EN 60598, CE.

Warning: Groundlights can be a glare, slip, trip or burn hazard. Vandalism or accidental breakage can result in electrical, glass or trip hazard. Locate to avoid or minimise these hazards.

Veelite



DIMENSIONS

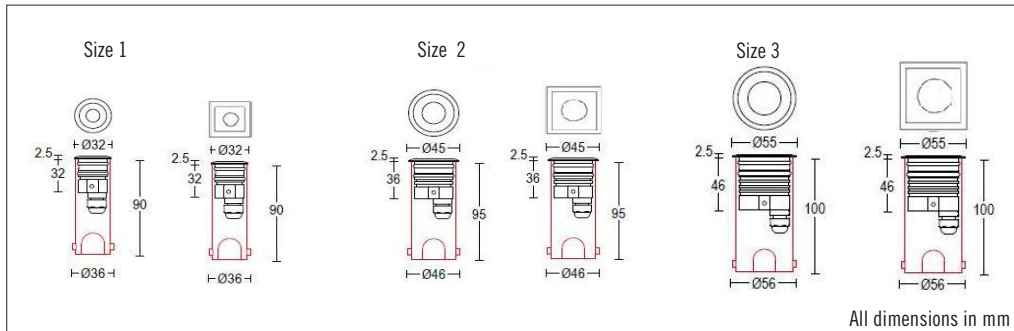

Remote LED Driver



ORDERING CODE

Wattage	Type	Size	Round Version	Square Version	Beam	Details	+ Installation Frame	Remote Driver**	Lumens*
1.5w	LED	1	G1007.BAST400	G1227.BAST400	20°	500mA Driver - Remote*	GAC610	GAC083	162 lm
1.5w	LED	1	G1007.BAMT400	G1227.BAMT400	31°	500mA Driver - Remote*	GAC610	GAC083	162 lm
2w	LED	2	G1008.BAST400	G1228.BAST400	13°	700mA Driver - Remote*	GAC611	GAC084	210 lm
2w	LED	2	G1008.BAMT400	G1228.BAMT400	25°	700mA Driver - Remote*	GAC611	GAC084	210 lm
3w	LED	3	G1009.BGST400	G1229.BGST400	14°	1050mA Driver - Remote*	GAC612	GAC085	307 lm
3w	LED	3	G1009.BGMT400	G1229.BGMT400	36°	1050mA Driver - Remote*	GAC612	GAC085	307 lm
6w	LED	3	G1009.AHMT400	G1229.AHMT400	25°	350mA Driver - Remote*	GAC612	GAC021	877 lm
6w	LED	3	G1009.AHFT400	G1229.AHFT400	55°	350mA Driver - Remote*	GAC612	GAC021	877 lm

*Source lumens

**Please specify whether IP20 or IP67 driver required

OPTIONS

3K: 3000K, Warm White

DALI: DALI on request

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 975

Veelite