



Helix Series

External lighting



Architectural luminaire suitable for commercial and retail centres.

Construction: Separate internal die-cast aluminium luminaire IP65 within a stainless steel external cone. Supplied with integral pole bracket.

Lens: Polycarbonate.

Installation: Slide down over top of conical pole and tighten grub screws.

LED: 36w or 70w, 4K.

Finish: Blasted finish on stainless steel. RAL colours on request.

Options: Polished finish.


Product Compliance: EN 60598; CE.



DIMENSIONS

All dimensions are in mm.

EPA 0.28 m²
Weight 24 Kgs

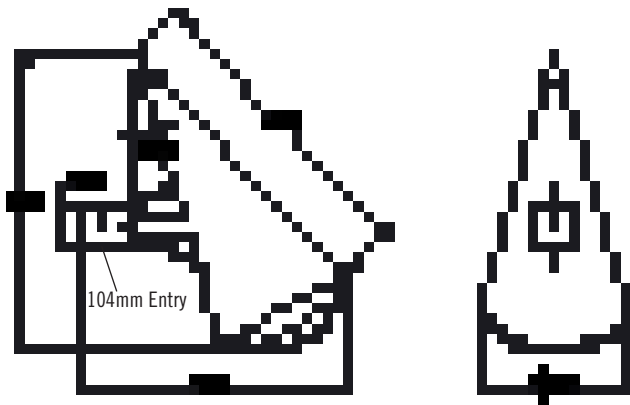

ORDERING CODE

Code	LED	Details
5HEL20LGA	36w LED	Stainless Steel Blasted Finish
5HEL21LGA	70w LED	Stainless Steel Blasted Finish

OPTIONS

RAL: Pls specify
POL: Polished Stainless Finish
PC: Photocell
DALI: DALI