




Maxi-Trak Series

Recessed
Groundlight



Maxi-Trak Series is a linear recessed ground light available in several lengths.

Construction: Die cast and extruded anodized aluminium, with 8mm tempered glass lens. IP68. IK10. Not suitable for drive over.

Installation: Separate Installation
Cassette supplied with Luminaire.
200mm drainage area needed.
Surface Temperature $\leq 50^{\circ}\text{C}$.

LED: 6w - 63w LEDs. Symmetric, 4000K as standard (3000K on request).

Driver: Remote 24 VDC driver required.


Options: 3000K, Various Beam Options, DALI. See all also 353-Trak Series for smaller version.

Manufactured: EU.

Product Compliance: EN 60598; CE.

Warning: Groundlite can be glare , slip or burn hazard. Vandalism or accidental breakage can result in electrical, glass or trip hazard. Locate to avoid or minimise these hazards.

DIMENSIONS

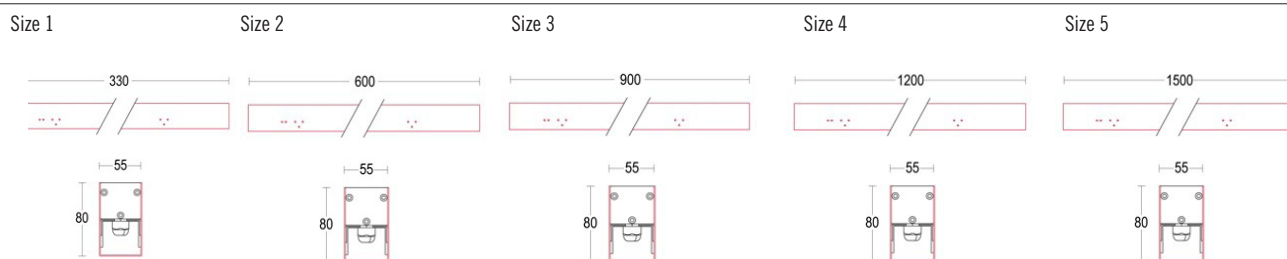

All dimensions in mm.

ORDERING CODE - Groundlight

Wattage	Type	Size	Code	Details	Lens	+ Cassette	Lumens*
6w	LED	1	G1545.AHXO400	MaxiTrak, 4K, Symmetric Beam 69° x 139°	Opal	GAC433	664 lm
13w	LED	1	G1545.BRAT400	MaxiTrak, 4K, Asymmetric Beam 78° x 47°	Clear	GAC433	1308 lm
13w	LED	1	G1545.BRET400	MaxiTrak, 4K, Elliptical Beam 14° x 47°	Clear	GAC433	1308 lm
13w	LED	1	G1545.BRFT400	MaxiTrak, 4K, Symmetric Beam 50°	Clear	GAC433	1308 lm
13w	LED	1	G1545.BRMT400	MaxiTrak, 4K, Symmetric Beam 25°	Clear	GAC433	1308 lm
13w	LED	1	G1545.BRST400	MaxiTrak, 4K, Symmetric Beam 12°	Clear	GAC433	1308 lm
12w	LED	2	G1546.BRXO400	MaxiTrak, 4K, Symmetric Beam 69° x 139°	Opal	GAC434	1328 lm
26w	LED	2	G1546.NGAT400	MaxiTrak, 4K, Asymmetric Beam 78° x 47°	Clear	GAC434	2616 lm
26w	LED	2	G1546.NGET400	MaxiTrak, 4K, Elliptical Beam 14° x 47°	Clear	GAC434	2616 lm
26w	LED	2	G1546.NGFT400	MaxiTrak, 4K, Symmetric Beam 50°	Clear	GAC434	2616 lm
26w	LED	2	G1546.NGMT400	MaxiTrak, 4K, Symmetric Beam 25°	Clear	GAC434	2616 lm
26w	LED	2	G1546.NGST400	MaxiTrak, 4K, Symmetric Beam 12°	Clear	GAC434	2616 lm
18w	LED	3	G1547.BUXO400	MaxiTrak, 4K, Symmetric Beam 69° x 139°	Opal	GAC435	1992 lm
38w	LED	3	G1547.ENAT400	MaxiTrak, 4K, Asymmetric Beam 78° x 47°	Clear	GAC435	3924 lm
38w	LED	3	G1547.ENET400	MaxiTrak, 4K, Elliptical Beam 14° x 47°	Clear	GAC435	3924 lm
38w	LED	3	G1547.ENFT400	MaxiTrak, 4K, Symmetric Beam 50°	Clear	GAC435	3924 lm
38w	LED	3	G1547.ENMT400	MaxiTrak, 4K, Symmetric Beam 25°	Clear	GAC435	3924 lm
38w	LED	3	G1547.ENST400	MaxiTrak, 4K, Symmetric Beam 12°	Clear	GAC435	3924 lm
24w	LED	4	G1548.NGXO400	MaxiTrak, 4K, Symmetric Beam 69° x 139°	Opal	GAC436	2656 lm
51w	LED	4	G1548.FLAT400	MaxiTrak, 4K, Asymmetric Beam 78° x 47°	Clear	GAC436	5232 lm
51w	LED	4	G1548.FLET400	MaxiTrak, 4K, Elliptical Beam 14° x 47°	Clear	GAC436	5232 lm
51w	LED	4	G1548.FLFT400	MaxiTrak, 4K, Symmetric Beam 50°	Clear	GAC436	5232 lm
51w	LED	4	G1548.FLMT400	MaxiTrak, 4K, Symmetric Beam 25°	Clear	GAC436	5232 lm
51w	LED	4	G1548.FLST400	MaxiTrak, 4K, Symmetric Beam 12°	Clear	GAC436	5232 lm
30w	LED	5	G1549.FNXO400	MaxiTrak, 4K, Symmetric Beam 69° x 139°	Opal	GAC437	3320 lm
63w	LED	5	G1549.MPAT400	MaxiTrak, 4K, Asymmetric Beam 78° x 47°	Clear	GAC437	6540 lm
63w	LED	5	G1549.MPET400	MaxiTrak, 4K, Elliptical Beam 14° x 47°	Clear	GAC437	6540 lm
63w	LED	5	G1549.MPFT400	MaxiTrak, 4K, Symmetric Beam 50°	Clear	GAC437	6540 lm
63w	LED	5	G1549.MPMT400	MaxiTrak, 4K, Symmetric Beam 25°	Clear	GAC437	6540 lm
63w	LED	5	G1549.MPST400	MaxiTrak, 4K, Symmetric Beam 12°	Clear	GAC437	6540 lm

ORDERING CODE - Remote Driver

14w	-	-	GAC146.0024014FN-67	Remote Driver 14w, 24 VDC	-	-	-
40w	-	-	GAC088.0024040FN-67	Remote Driver 40w, 24 VDC	-	-	-
81w	-	-	GAC089.0024081FN-67	Remote Driver 81w, 24 VDC	-	-	-
120w	-	-	GAC090.0024120FN-67	Remote Driver 120w, 24 VDC	-	-	-
-	-	-	GAC205-IP66	IP66 housing for driver	-	-	-

*Source lumens

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 352

Veelite