






Torres Wall

External lighting



Modern LED compact square wall luminaire with options of narrow or wide beams, downlight or uplight and downlight, ideal for facade lighting.

Construction: Die-cast and extruded Aluminium. IP65. IK08.

Lens: 4mm tempered glass.

Installation: Wall mounted via square mounting bracket fixed to rear side of luminaire. Ceiling version on request.

Finish: Light Grey RAL 9006 finish as standard. Dark Grey or White on request.

LED: Available in 6w-52w LED. 4K as standard, 3K on request.



Driver: Internal LED driver.

Options: Narrow, medium or wide beam angles, DALI, RAL colours, ceiling version on request.

Manufactured: EU.

Product Compliance: EN 60598; CE, UKCA.

DIMENSIONS

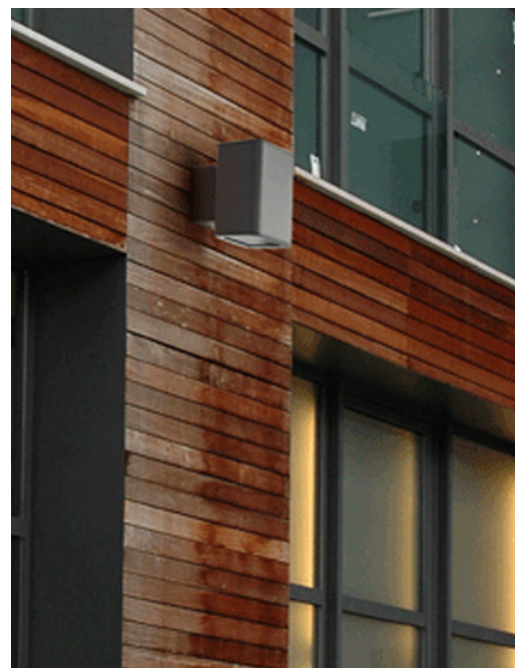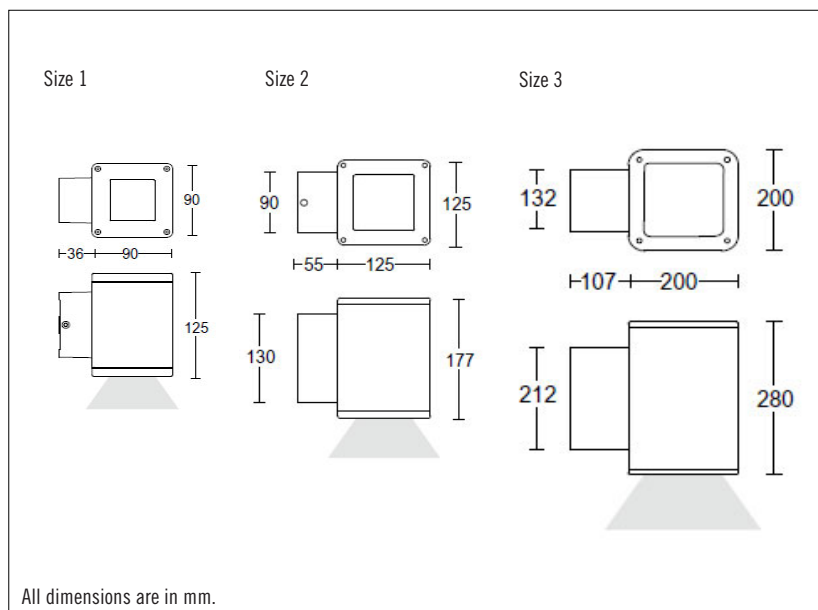

ORDERING CODE

Wattage	Type	Size	Code	Description	Lumens*
6w	LED	1	G1960.AHFT400	Downlighter 32° beam	801 lm
12w	LED	1	G1960.BRFT400	Downlighter 32° beam	1492 lm
12w	LED	1	G1961.BRFT400	Uplighter/downlighter 2x32° beam	2x801 lm
16w	LED	2	G1958.FAST400	Downlighter 14° beam	1997 lm
16w	LED	2	G1958.FAMT400	Downlighter 22° beam	1997 lm
16w	LED	2	G1958.FAFT400	Downlighter 35° beam	1997 lm
32w	LED	2	G1959.FNST400	Uplighter/downlighter 2x14° beam	2x1997 lm
32w	LED	2	G1959.FNMT400	Uplighter/downlighter 2x22° beam	2x1997 lm
32w	LED	2	G1959.FNFT400	Uplighter/downlighter 2x35° beam	2x1997 lm
26w	LED	3	G1956.CGST400	Downlighter 15° beam	3012 lm
26w	LED	3	G1956.CGMT400	Downlighter 37° beam	3012 lm
26w	LED	3	G1956.CGFT400	Downlighter 74° beam	3012 lm
39w	LED	3	G1956.CDST400	Downlighter 15° beam	4336 lm
39w	LED	3	G1956.CDMT400	Downlighter 37° beam	4336 lm
39w	LED	3	G1956.CDFT400	Downlighter 74° beam	4336 lm
52w	LED	3	G1957.LFST400	Uplighter/downlighter 2x15° beam	2x3012 lm
52w	LED	3	G1957.LFMT400	Uplighter/downlighter 2x37° beam	2x3012 lm
52w	LED	3	G1957.LFFT400	Uplighter/downlighter 2x74° beam	2x3012 lm

*Source lumens

OPTIONS

3K: 3000K, Warm White
.05: Dark Grey Finish
.19: Light Grey Finish
DALI: DALI on request
EM: Emergency 3 hours - Size 3 only



Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 419

Veelite