



Torres Ceiling

External lighting



Modern LED compact square ceiling luminaire with options of narrow or wide beams, ideal for Canopies and Entrance Areas.

Construction: Die-cast and extruded Aluminium. IP65. IK08 (IK06 on Flat Version).

Lens: 4mm tempered glass.

Installation: Ceiling mounted.

Finish: Light Grey RAL 9006 finish as standard. Dark Grey or White on request.

LED: Available in 5w-38w LED. 4000K as standard, 3000K on request.

Driver: Internal LED driver.


Options: Narrow, medium or wide beam angles, DALI, RAL colours.

Manufactured: EU.


Product Compliance: EN 60598; CE, UKCA.

DIMENSIONS

Torres

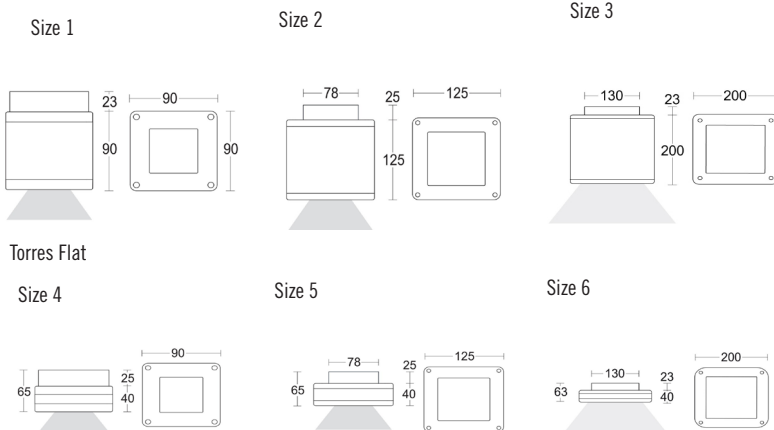

Torres Flat

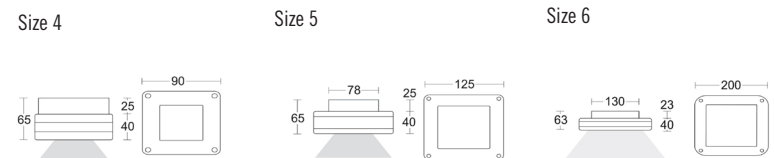

All dimensions are in mm.

Reflector Version



Lens Version



ORDERING CODE

Wattage	Type	Size	Code	Description	Lumens*
5w	LED	1	G1962.ETGT400	Torres Downlight 16° beam (Lens)	592 lm
5w	LED	1	G1962.ETH400	Torres Downlight 36° beam (Lens)	592 lm
5w	LED	1	G1962.ETPT400	Torres Downlight 53° beam (Lens)	592 lm
5w	LED	1	G1962.EYT400	Torres Downlight 44° x 64° beam (Lens)	592 lm
6.5w	LED	1	G1962.AHST400	Torres Downlight 14° beam (Reflector)	1043 lm
6.5w	LED	1	G1962.AHFT400	Torres Downlight 32° beam (Reflector)	1043 lm
15w	LED	2	G1963.LRFT400	Torres Downlight 35° beam (Reflector)	2345 lm
17w	LED	2	G1963.LRGT400	Torres Downlight 16° beam (Lens)	2116 lm
17w	LED	2	G1963.LRHT400	Torres Downlight 36° beam (Lens)	2116 lm
17w	LED	2	G1963.LRPT400	Torres Downlight 53° beam (Lens)	2116 lm
17w	LED	2	G1963.LRYT400	Torres Downlight 44° x 64° beam (Lens)	2116 lm
27w	LED	2	G1963.FNFT400	Torres Downlight 35° beam (Reflector)	4022 lm
24w	LED	3	G1964.CGFT400	Torres Downlight 74° beam (Reflector)	3555 lm
26w	LED	3	G1964.CGMT400	Torres Downlight 37° beam (Reflector)	3716 lm
37w	LED	3	G1964.CDFT400	Torres Downlight 74° beam (Reflector)	5149 lm
38w	LED	3	G1964.ACGT400	Torres Downlight 16° beam (Lens)	4762 lm
38w	LED	3	G1964.ACHT400	Torres Downlight 36° beam (Lens)	4762 lm
38w	LED	3	G1964.ACPT400	Torres Downlight 53° beam (Lens)	4762 lm
38w	LED	3	G1964.ACYT400	Torres Downlight 44° x 64° beam (Lens)	4762 lm
Flat Version					
8w	LED	4	G1208.LVMT400	Torres Downlight 29° beam	790 lm
20w	LED	5	G1209.FAFT400	Torres Downlight 42° beam	2065 lm
18w	LED	6	G1210.BUFT400	Torres Downlight 45° beam	2836 lm

* Source Lumens

OPTIONS

3K: 3000K, Warm White
.05: Dark Grey Finish
.19: Light Grey Finish
DALI: DALI on request

Flat Version

